FOUR FINGER CLIPS (METRIC)

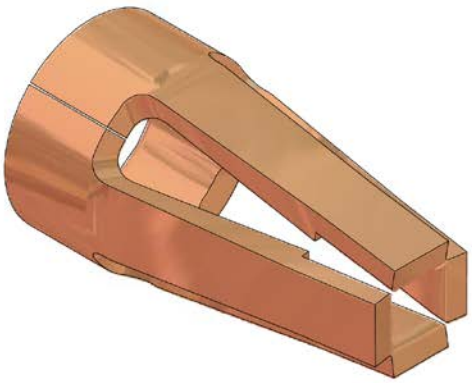



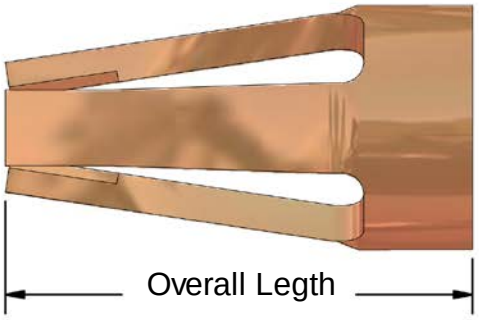

Unit: mm

PART NUMBER	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA.	TEST PIN DIAMETER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
411	1.12	1.65	0.38 - 0.56	0.46	135 GM	25 GM
412	1.12	1.65	0.38 - 0.56	0.46	260 GM	55 GM
413	1.12	1.65	0.38 - 0.56	0.46	520 GM	120 GM
420	1.12	2.11	0.38 - 0.56	0.46	45 GM	15 GM
430	1.12	2.11	0.38 - 0.64	0.43	270 GM	90 GM
431	1.12	2.11	0.38 - 0.64	0.46	675 GM	200 GM
440	1.35	2.97	0.55 - 0.81	I - 0.66 W - 0.61	385 GM	50 GM
450	1.75	3.81	0.91 - 1.27	I - 1.02 W - 0.76	325 GM 55 GM	60 GM 15 GM
460	2.03	3.81	1.00 - 1.50	I - 1.27 W - 1.02	375 GM	35 GM
471	1.63	2.41	0.81 - 1.15	1.02	2.27 KG	200 GM
470	1.61	3.05	0.81 - 1.17	I - 1.04 W - 0.99	350 GM	55 GM
472	1.63	3.05	0.81 - 1.15	I - 1.02 W - 0.89	1.02 KG	110 GM
480	2.24	3.15	1.20 - 1.63	I - 1.52 W - 1.27	440 GM	60 GM
490	2.74	3.76	1.65 - 2.10	I - 1.88 W - 1.83	1.36 KG	230 GM

NOTE: ALL CLIPS PRODUCED FROM BeCu ALLOY 172 1/2 HD AND HEAT TREATED AFTER FORMING.
ALL SPECIFICATIONS REFER TO CLIPS THAT ARE NOT PLATED.

THE ABOVE INFORMATION IS PROVIDED FOR REFERENCE ONLY. ENGINEERING DRAWINGS CAN BE PROVIDED.

Leyconn LEYCONN Electronics Co.,Ltd.
Add: Building 7, HongFa Jiateli Hi-TECH park, Shiyan District, Baoan, Shengzheng Ctty, 518000, P.R.China
TEL:+86(755)2607 8616 / 2607 8596
FAX:+86(755)2607 0522
http://www.leyconn.com
E-mail:sales@leyconn.com