


SPECIFICATIONS

Current Rating: 3 Amps
Withstanding Voltage: AC 600V/minute.
Insulation Resistance:1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C
Ⓢ Important Dimensions

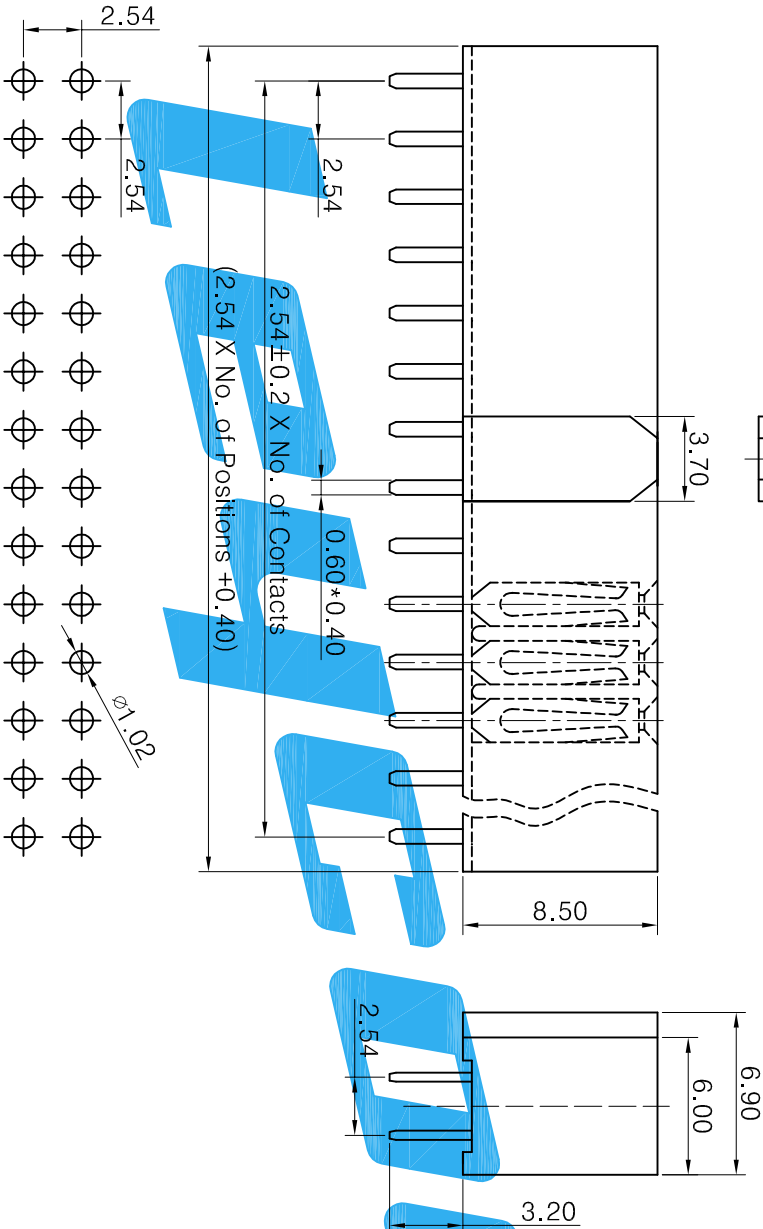

Part Number:

2 1 Q 2 N N 1 X X 0 X 0

Pitch: 2.54mm
Height of Insulator: 8.50mm
Number of row: 2
Pin number of each row: 21
Type of terminations: 1-Straight solder Type
Insulator Material: 1-PBT 2-LCP 4-PA46 5-PA6T 9-PA9T
Packaging Options: 1-Tube Packaging 3-Pallet Packaging
Plating Code: 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E		Units	mm	Scale	2:1	Drawing By	Date	2019/02/13
D		Tolerance Unless	Otherwise Specified			Lin-Wu	Date	2019/02/13
C						Reviewed By	Date	2019/02/13
B						YP-Liang	Date	2019/02/13
A						Approval By	Date	2019/02/13
REV						Kirby-Xiao	Date	2019/02/13
1								