


Rohs



Current Rating: 3 Amps

Withstanding Voltage: AC 600V/minute.

Insulation Resistance: 1000M Ω Min


Contact Resistance: 20m Ω Max

Insulator Material: Polyester(UL94V-0) See Part Number

Contact Material: Brass or Phosphor bronze

Plating: Au or Sn over 50u" Ni

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

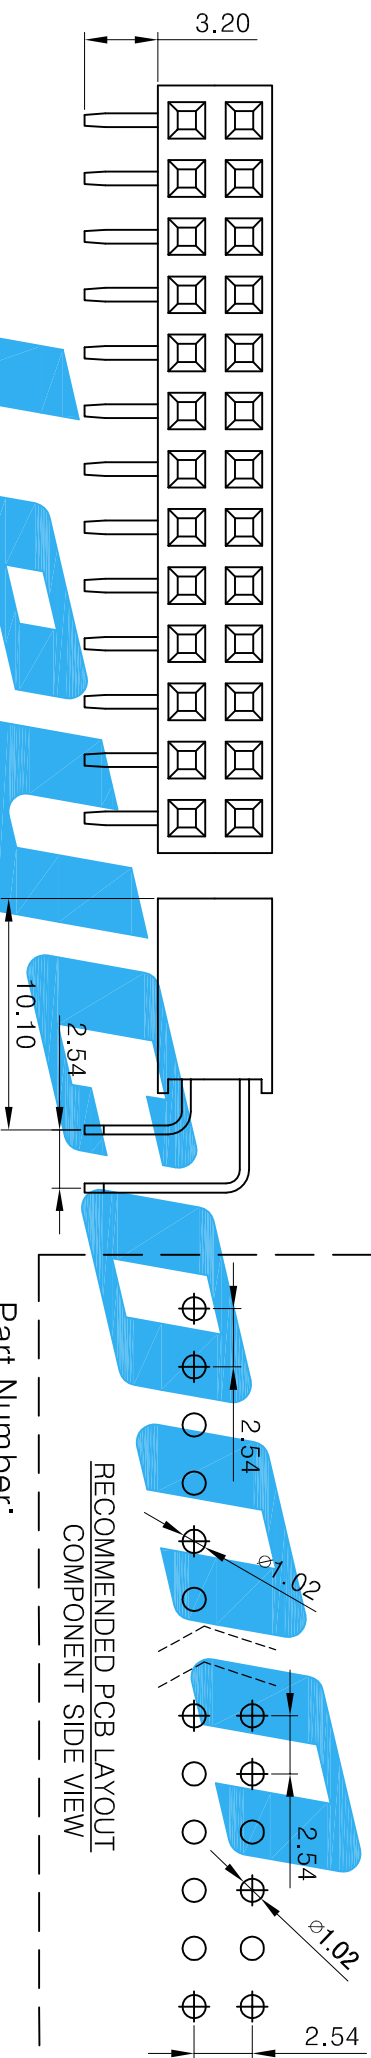

Part Number:

218XNN2XX0X0

Pitch: _____ Packaging Options: _____

1-2.54mm
Height of I

8-8.50mm

Number of row: _____

1-Single row 2-Double row

Pin number of each row: 01 ~ 40P/N

Type of terminations :

2-Right angle solser pin

Insulator Material : _____

1-1B1	2-LCP	
4-PA46	5-PA6T	9-PA9T

Plating Code :

0-1in over nickel	
1-Gold flash over nickel	
3-0.075um gold over nickel	
5-0.125um gold over nickel	
6-0.25um gold over nickel	
7-0.375um gold over nickel	
8-0.75um gold over nickel	
A-0.02um gold over nickel	
B-0.01um gold over nickel	

E				Units	mm	Scale	3:1	Drawing By	Date	<div> LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522 Http://www.leyconn.com</div>								
D				Tolerance Unless Otherwise Specified				Lin-Wu	2019/02/13									
C				.X ~ ±0.30 .XX ~ ±0.25 .XXX ~ ±0.20				Revised By	Date									
F	B							YP-Liang	2019/02/13									
	A							Approval By	Date									
REV				Angle ~ ± 3°				Kirby-Xiao	2019/02/13	<div></div>		Part No.		2.54mm Female Header Single/Double Row H=8.5mm,PIN=Type"Y"		218XNN2XX0X0	REV	A
1		2		3		4		5		6		7		8				