
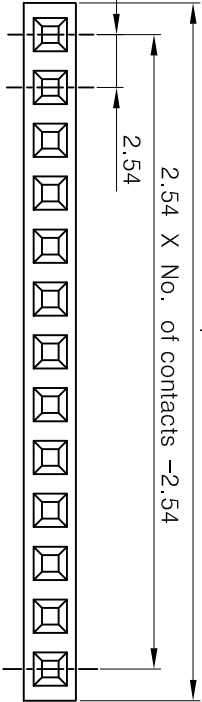


2.54 X No. of positions + 0.50

2.54 X No. of contacts - 2.54

2.54



Part Number	Dim A	Dim B
218XNN1XX3X0	2.50mm	3.15mm
218XNN1XX4X0	2.50mm	8.15mm
218XNN1XX5X0	5.00mm	5.65mm
218XNN1XX7X0	7.50mm	3.15mm
218XNN1XX9X0	2.50mm	12.2mm

SPECIFICATIONS

Current Rating: 3 Amps

Withstanding Voltage: AC 600V/minute.

Insulation Resistance: 1000MΩ Min

Contact Resistance: 20mΩ Max

Insulator Material: Polyester(UL94V-0) See Part Number

Contact Material: Brass

Contact Plating: Au or Sn over 50u" Ni

Operation Temperature: -40°C to +105°C

Part Number:

2 1 8 1 NN 1 X X X X 0

Pitch:

1-2.54mm

Height of Insulator:

8-8.50mm

Number of row:

1-Single row,

Pin number of each row:

01 ~ 40PIN

Type of terminations :

1-Straight solder pin

Insulator Material :

1-PBT 5-PA6T

4-PA46 9-PA9T

Plating Code :

0-Tin over nickel

1-Gold flash over nickel

3-0.075um gold over nickel

5-0.125um gold over nickel

6-0.25um gold over nickel

7-0.375um gold over nickel

8-0.75um gold over nickel

A-0.02um gold over nickel

B-0.01um gold over nickel

