


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

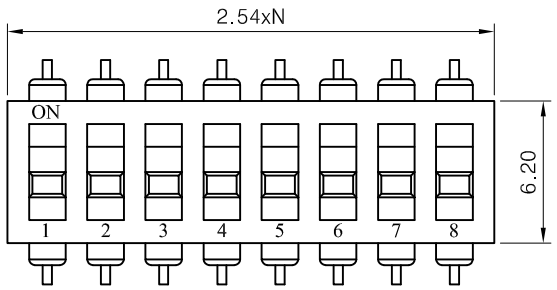

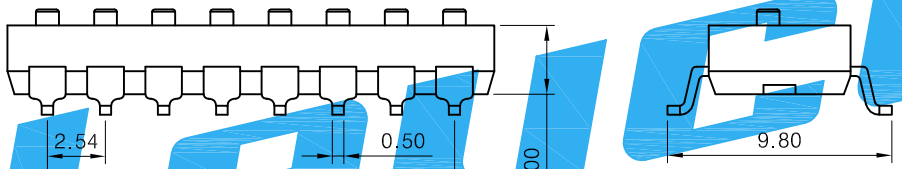

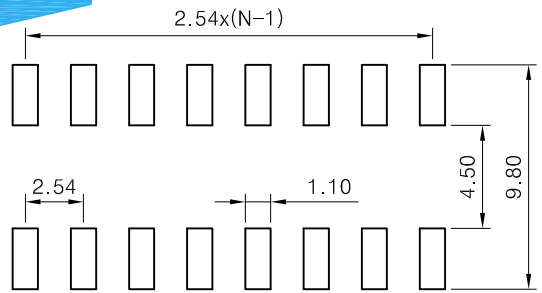

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED
Leyconn
CONFIDENTIAL
2019-03-15

SPECIFICATIONS:
MECHANICAL:
Operation force: 8N Max
Operation temperature:-25°C to +80°C
Storage temperature :-40°C to +85°C
ELECTRICAL:
Electrical life: 2000 operations Cycles per switch 24 V/DC,25mA
Non-switching rating: 100mA 50V/DC
Switching rating :25mA 24V/DC
Contact resistance :(a)50mΩ max.at initial
(b)100mΩMin,after life test
Insulation resistance:1000MΩMin,at 500V/DC
Circuit: single pole single throw
MATERIALS:
Contact material: phosphor bronze
Contact plating: gold or Tin over 50u" Ni
Insulator material: Polyester(UL94V-0) Standard:PBT

Part Number:

460 NN 3 X 3 X 0 1 X

Series Number: 460
Number Contact: NN — 02-16
Tial & Mounting Style: 3 — 3-S.M.T Type
Pitch:(Unit:mm) 3 — 1-2.54
Insulator: 3 — 3-Black
Contact Plated: X — 0-Tin 1-Gold flash
Packaging Options: 0 — 1-Tube Packaging
Others: 1 — X

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	15/03/19

Units: mm | Scale: 3:1
Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	YP-Liang	2019/03/15
Reviwed By	YP-Liang	2019/03/15
Approval By	Kirby-Xiao	2019/03/15

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet: 1 of 1
Third Angle Projection

Title: Switches Straight SMT Type H3.00
Part No.: 460NN3X3X01X
REV: A1