



This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

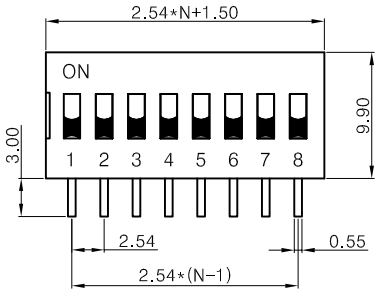




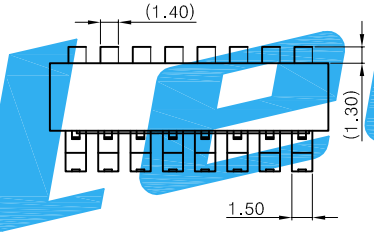



(Schematic)

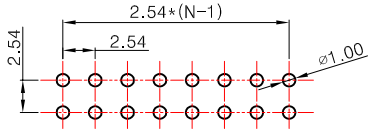

(P.C.B.Layout)

ISSUED
Leyconn
CONFIDENTIAL
2019-03-18

SPECIFICATIONS:
MECHANICAL:
Operation Force: 1000gf Max
Operation Temperature:-30°C to +85°C
Storage Temperature :-40°C to +85°C
ELECTRICAL:
Electrical Life: 2000 operations Cycles perswich 24 V/DC,25mA
Nonswitching Rating: 100mA 50V/DC
Switching Rating :25mA 24V/DC
Contact Resistance :(a)50mΩ max.at initial
(b)100mΩMin,after life test
Insulation Resistance:1000MΩMin,at 500V/DC
Circuit: Single pole single throw
MATERIALS:
Contact Material: Phosphor Bronze
Contact Plating: Gold or Tin over Nickel
Insulator Material: Polyester(UL94V-0) Standard:PBT

Part Number:

460 NN 4 1 X X 0 1 X

Series Number:

Number Contact:
02-12

Pitch:(Unit:mm)
1-2.54

Contact Plated:
0-Tin 1-Gold flash

Insulator:
1-Red 2-Blue
A-Red GF30

Packaging Options:
1-Tube Packaging

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	18/03/19

Units mm | Scale 5:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.10
.XXX ~ ±0.05
Angle ~ ± 3°

Drawing By	YP-Liang	Date 2019/03/18
Reviwed By	Nick-Yin	Date 2019/03/18
Approval By	Kirby-Xiao	Date 2019/03/18

Third Angle Projection

Leyconn
Http://www.leyconn.com
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1

Title: 平拔拔码开关 NNP 90°

Part No.: 460NN41XX01X REV A