
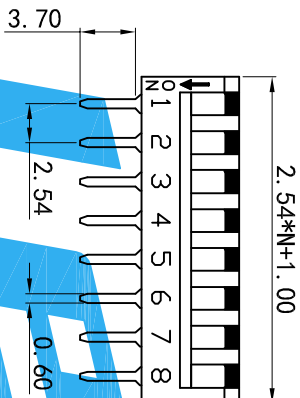


SPECIFICATIONS:
MECHANICAL:
Operation force: 8N Max
Operation temperature: -25°C to +70°C
Storage temperature: -40°C to +85°C
ELECTRICAL:
Electrical life: 2000 operations Cycles per switch 24 V/DC, 25mA
Non-switching rating: 100mA 50V/DC
Switching rating: 25mA 24V/DC
Contact resistance: (a) 50mΩ max. at initial
(b) 100mΩ Min. after life test

Insulation resistance: 1000MΩ Min. at 500V/DC
Circuit: single pole single throw
MATERIALS:
Contact material: phosphor bronze
Contact plating: gold over 50u" Ni
Insulator material: Polyester (UL94V-0) Standard: PBT

Part Number:

460 NN A 1 3 1 0 1 X

Series Number: 460 NN A 1 3 1 0 1 X
Number Contact: 1-3
Packaging Options: 1-Tube Packaging

Trial & Mounting Style: 1-Gold flash
A-A
Pitch: (Unit:mm) 1-2.54
Insulator: 3-Black

LEYCONN ELECTRONICS CO., LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Title Plano Type H6.50
Part No. 460NNA13101X
REV A

1	2	3	4	5	6	7	8
E			Units mm	Scale 2:1	Drawing By YP-Liang	Date 2019/03/20	
D			Tolerance Unless Otherwise Specified		Reviewed By Nick-Yin	Date 2019/03/20	
C			.X ~ ±0.30		Approval By Kirby-Xiao	Date 2019/03/20	
B			.XX ~ ±0.25				
A			.XXX ~ ±0.20				
REV			Angle ~ ±3°				
1	2	3	4	5	6	7	8