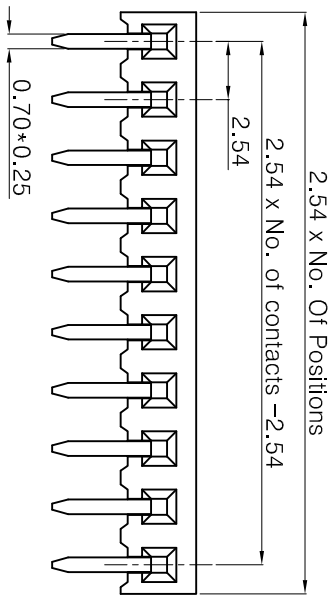


SPECIFICATIONS

Current Rating: 3 Amps

Withstanding Voltage: AC 600V/minute.

Insulation Resistance: 1000M Ω Min


Contact Resistance: 20m Ω Max

Insulator Material: Polyester(UL94V-0) See Part Number

Contact Material: Phosphor bronze



Contact Plating: Au or Sn over 50u" Ni

Operation Temperature: -40°C to +105°C

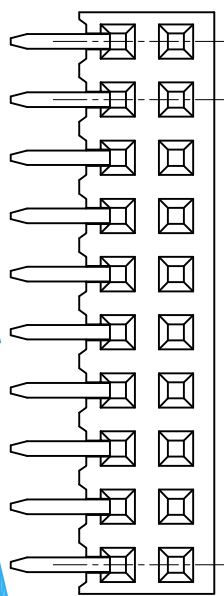

Part Number:

2 1 E X N N C X X 0 X 0

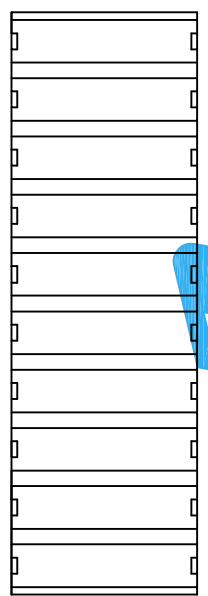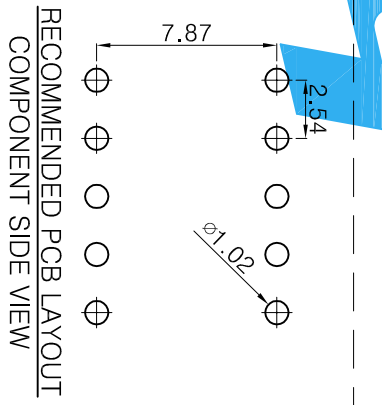

Pitch: 1-2.54mm

Height of Insulator: (mm) E-8.10

Number of row: 1-Single row 2-Double row

Pin number of each row: 01 ~50PIN

Type of terminations :

Insulator Material : 2-LCP 5-PA6T 9-PA9T

Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging 3-Pallet Packaging

Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel

ISSUED

LEYCONN

CONFIDENTIAL

2019-02-13

E		Units	mm	Scale	3:1	Drawing By	Lin-Wu	Date	2019/02/13	LEYCONN		LEYCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless		Otherwise Specified		Reviewed By	YP-Liang	Date	2019/02/13	Http://www.leyconn.com		深圳市联益康电子有限公司
C		.X ~ ± 0.30								Sheet		1 of 1
B		.XX ~ ± 0.25								Title		2.54*8.1 Female Header Single/Double Row
A		.XXX ~ ± 0.20				Approval By		Date	2019/02/13	Third Angle Projection		X*NNP RA Type
REV		DESCRIPTION.		Angle ~ $\pm 3^\circ$		Kirby-Xiao		Date	2019/02/13	Part No.		21EXNNCXX0X0