

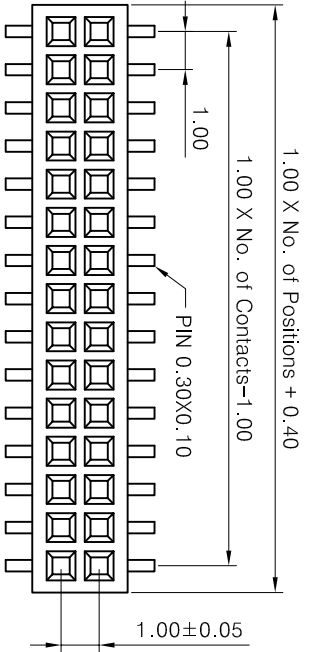
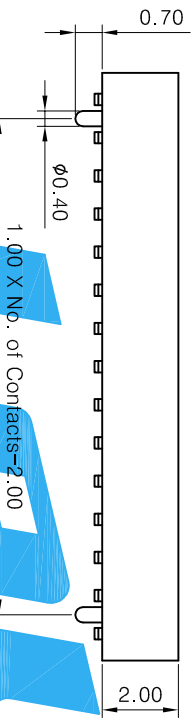


SPECIFICATIONS
Current Rating: 1 Amps
Withstanding Voltage: AC 200V
Insulation Resistance:500M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C



Part Number:

2 5 2 2 NN 3 X X 1 X 0

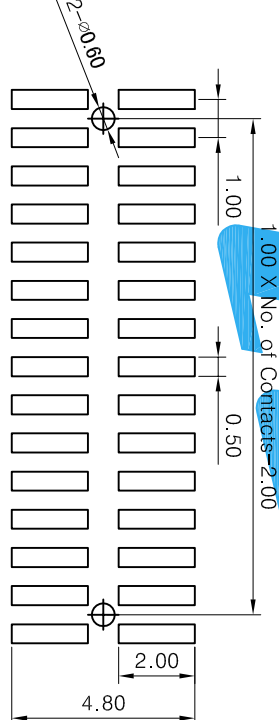

Pitch: 5-1.00mm
Height of Insulator: 2-2.00mm
Number of row: 2-Double row
Pin number of each row: 01-50PIN
Type of terminations : 3-Surface mount-perpendicular
Insulator Material : 2-LCP 4-PA46 5-PA6T 9-PA9T
Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging
Location Peg , Pick &Place pad Options: 0-Without Location Peg 1-With Location Peg
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E				Units	mm	Scale	5:1			Drawing By	Date	<div><div>leyconn</div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div></div>					
D				Tolerance Unless				Revised By	Date	2019/02/13							
C				Otherwise Specified													
F				.X ~ ±0.30				YP-Liang	2019/02/13								
B				.XX ~ ±0.25				Approval By	Date		Third Angle Projection		Part No.	2522NN3XXXX0	REV	A	
A				.XXX ~ ±0.20													
REV				Angle ~ ± 3°				Kirby-Xiao	2019/02/13								
1		2		3		4		5		6		7		8			