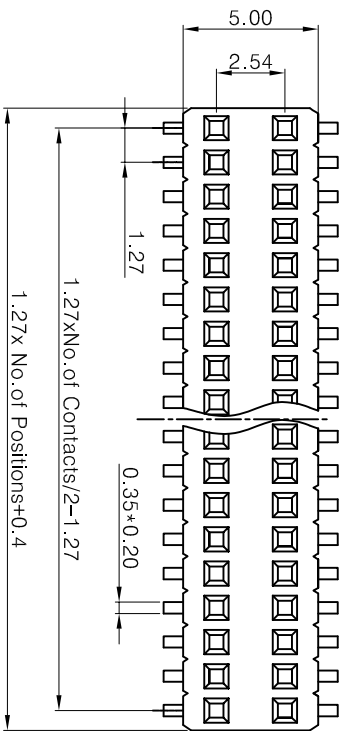




SPECIFICATIONS
Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number

Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C


Part Number:

2 3 6 2 NN 3 X X X X 0

Pitch: 3-1.27mm
Height of Insulator: (mm) 6-5.70
Number of row: 2-Double row
Pin number of each row: 01 ~50PIN
Type of terminations : 3-Surface mount-Perpendicular
Insulator Material : 2-LCP 5-PA6T 9-PA9T
Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging
Location Peg, Pick &Place pad Options: 0-Without Location Peg 1-With Location Peg 2-Without Location Peg+CAP 3-With Location Peg+CAP 4-With Location Peg+Mylar
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel

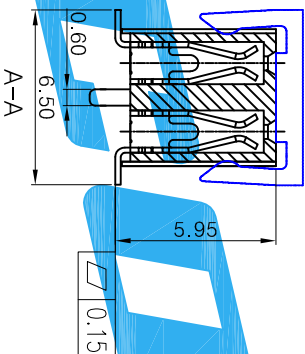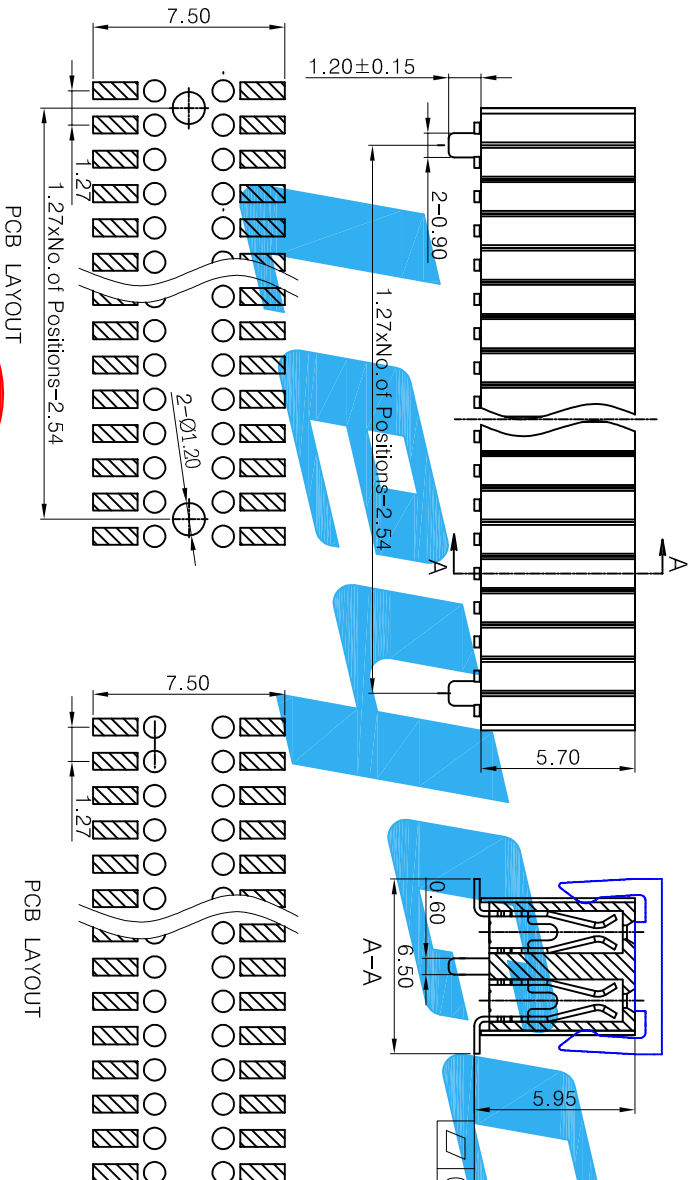

PCB LAYOUT



PCB LAYOUT

E		Units	mm	Scale	5:1	Drawing By	Date	2019/02/14
D		Tolerance Unless	Otherwise Specified			Lin-Wu		
C			.X ~ ±0.30			Reviewed By	Date	
B			.XX ~ ±0.25			YP-Liang	2019/02/14	
A		RELEASED	14/02/19			Approval By	Date	
REV		DESCRIPTION.	Angle ~ ± 3°			Kirby-Xiao	2019/02/14	
1	2	3	4	5	6	7	8	

LEYCONN

LEYCONN ELECTRONICS CO.,LTD.

深圳市联益康电子有限公司

Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1 Title 1.27mm Female Header,H5.7

Third Angle Projection Part No. 2362NN3XXXXX0 REV A