



This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

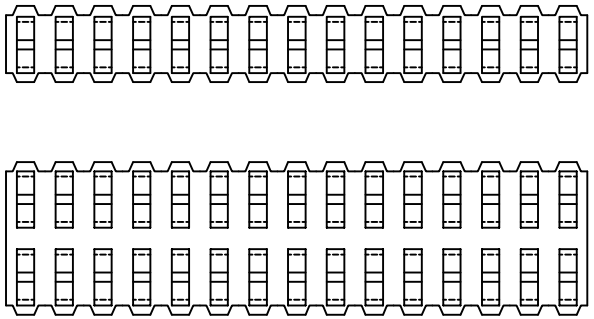


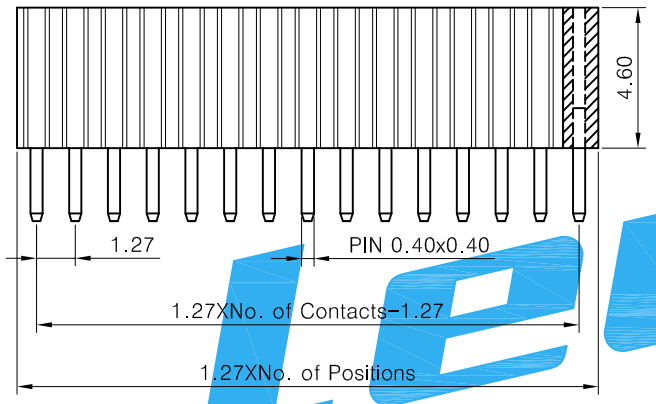

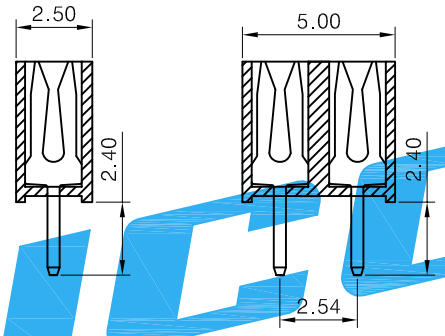



RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

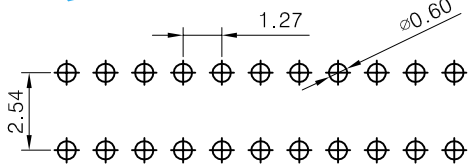

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED
Leyconn
CONFIDENTIAL
2019-02-14

SPECIFICATIONS

Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃

Part Number:

2 3 5 X NN 1 X X 0 X 0

Pitch:
3-1.27mm

Height of Insulator:(mm)
5-4.60

Number of row:
1-Single row
2-Double row

Pin number of each row:
01 ~50PIN

Type of terminations :
1-Straight solder

Insulator Material :
2-LCP 5-PA6T
4-PA46 9-PA9T

Packaging Options :
1-Tube Packaging
3-Pallet Packging

Plating Code :
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	14/02/19

Units: mm | Scale: 4:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	Lin-Wu	2019/02/14
Reviwed By	YP-Liang	2019/02/14
Approval By	Kirby-Xiao	2019/02/14

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title: 1.27*4.6 mm Female Header, Type"Y" Single/Double Row DIP Type
Part No. 235XNN1XX0X0 REV A