



Rohs



Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance: 500M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester (UL94V-0) See Part Number
Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C

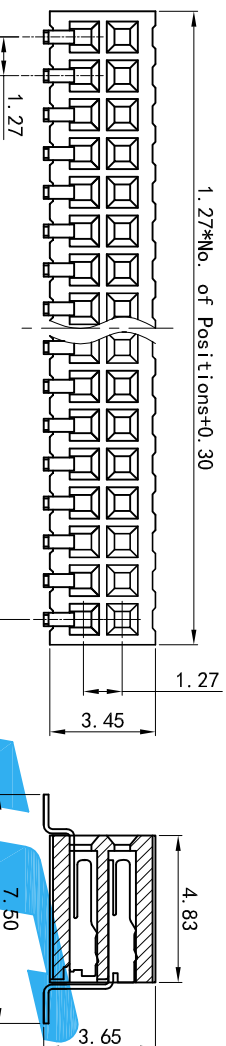

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0


23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

23E2NN3XX0X0

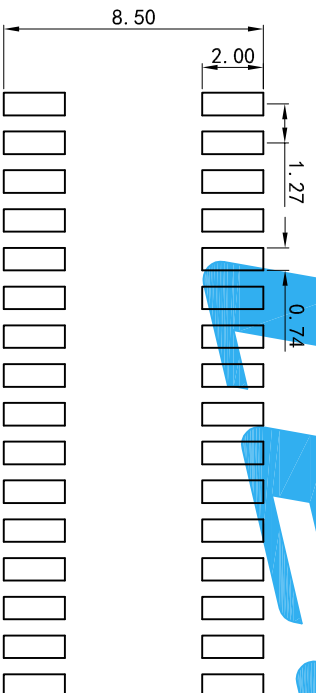

PCB LAYOUT

E			Units	mm	Scale	3:1	Drawing By	Date	 LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522			
D			Tolerance Unless				Lin-Wu	2019/02/14	Http://www.leyconn.com Sheet 1 of 1 Third Angle Projection			
C			Otherwise Specified				Revised By	Date				
B			.X ~ ±0.30				YP-Liang	2019/02/14				
A			.XX ~ ±0.25				Approval By	Date				
REV	DESCRIPTION.	Date	.XXX ~ ±0.20				Kirby-Xiao	2019/02/14	Part No. 23E2NN3XX0X0 REV A			