



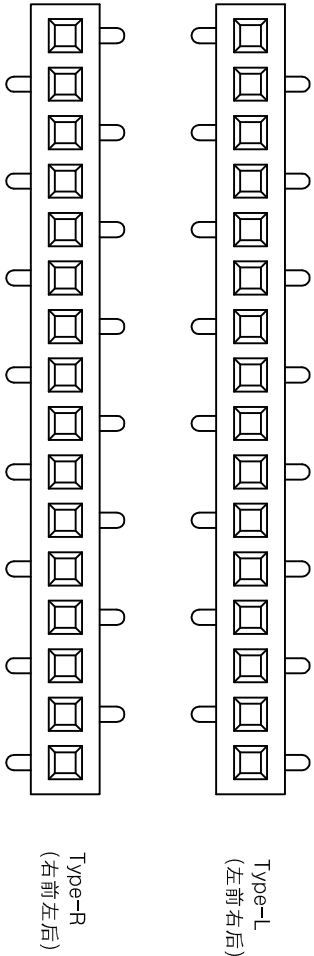

SPECIFICATIONS

Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max

Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40 $^{\circ}$ t+105 $^{\circ}$

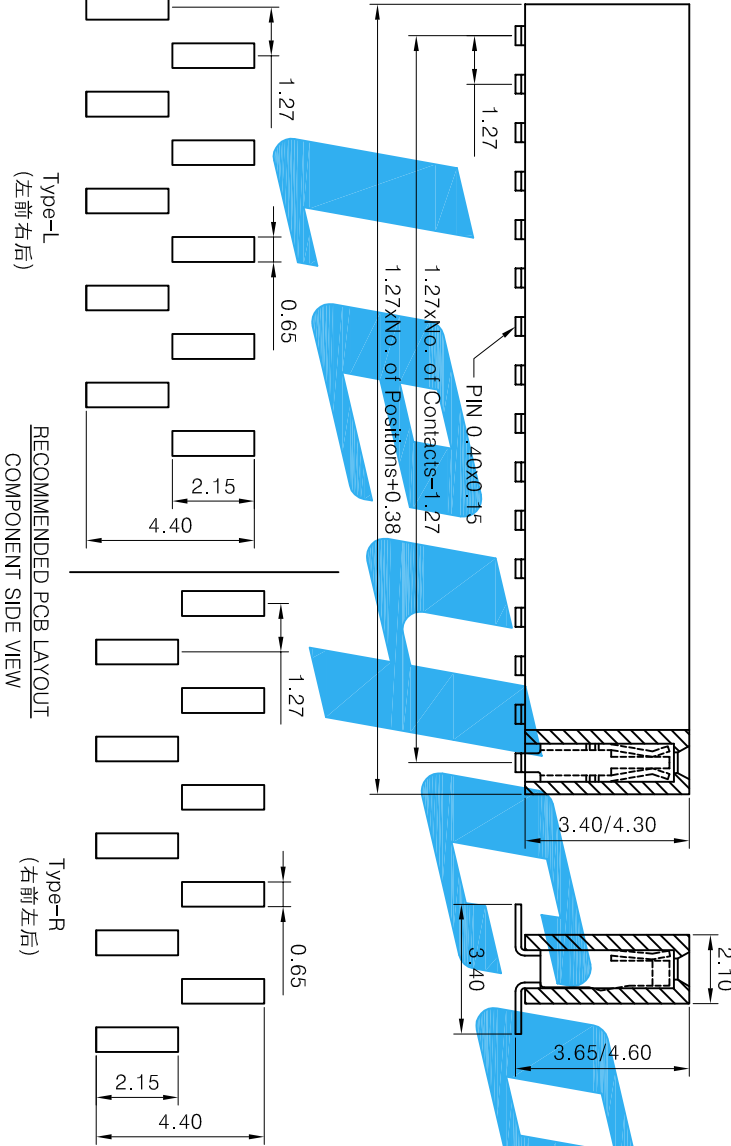

Part Number: 2 3 X 1 NN X X X X X 0

Pitch: 3-1.27mm
Height of Insulator:(mm) 3-3.40 4-4.30
Number of row: 1-Single row
Pin number of each row: 01~50PIN

Type of terminations :
L-Surface mount-TypeL(单排左前右后)
R-Surface mount-TypeR(单排右前左后)
3-Surface mount-perpendicular(奇数)

Insulator Material :
2-LCP 5-PA6T 9-PA9T

Plating Code :
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel
A-0.02um gold over nickel
B-0.01um gold over nickel

Location Peg ,Pick &Place pad Options:
0-Standard
2-With CAP

Packaging Options :
1-Tube Packaging
2-Tape & Reel Packaging

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

E		Units	mm	Scale	5:1	Drawing By	Date	leyconn		LEVCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless				Lin-Wu	2019/02/13	Http://www.leyconn.com		深圳市联益康电子有限公司
C		Otherwise Specified				Reviewed By	Date	TEL: +86(755)26078616		FAX: 26070522
B		.XX ~ $\pm$ 0.30				YP-Liang	2019/02/13	Sheet 1 of 1		Title 1.27mm Female Header, H3.40/4.30
A		RELEASED				Approval By	Date	Third Angle Projection		Single Row S.M.T Type W2.10
REV		DESCRIPTION.		Angle ~ $\pm$ 3 $^{\circ}$		Kirby-Xiao	2019/02/13	Part No.		23X1NNXXXXX0
1	2	3	4	5	6	7	8	REV		A