



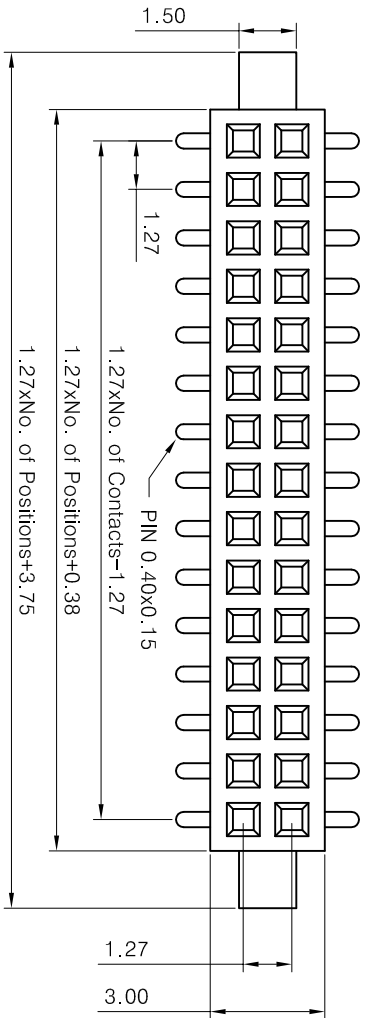

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

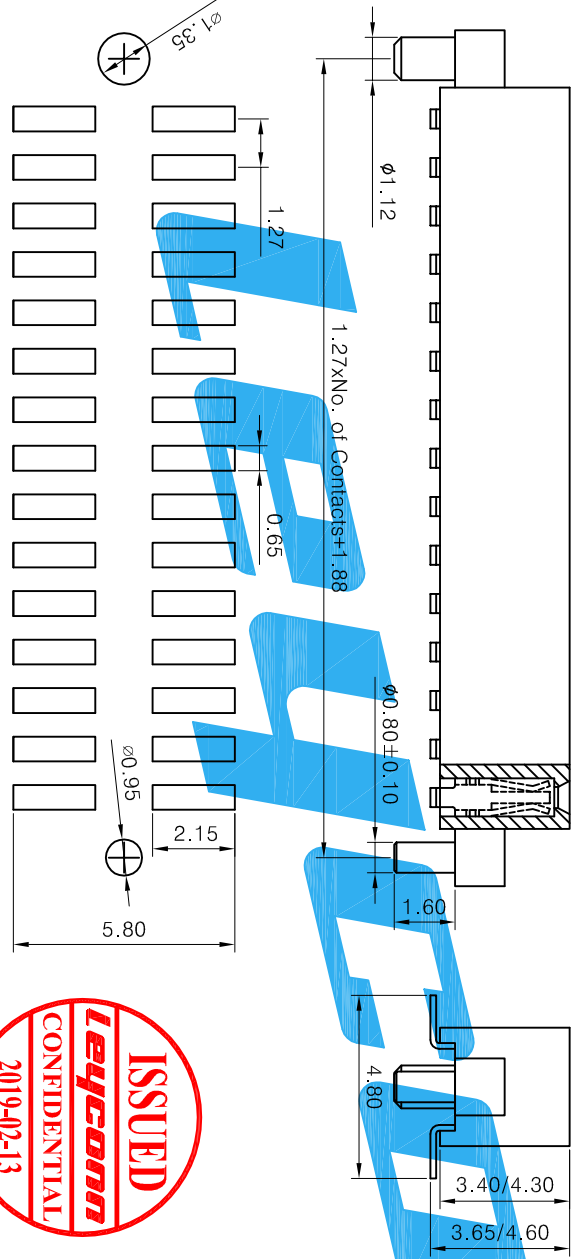

SPECIFICATIONS

Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C

Part Number:

2 3 X 2 NN 3 X X 1 X 0

- Pitch: 3-1.27mm
Height of Insulator:(mm)
A-3.40 B-4.30
Number of row: 2-Double row
Pin number of each row: 01 ~50PIN
Type of terminations : 3-Surface mount-perpendicular
Insulator Material : 2-LCP 5-PAGT 9-PAGT
Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging
Location Peg ,Pick &Place pad Options: 1-With Location Peg
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet	1 of 1	Title	1.27mm Female Header, H3.40/4.30
Third Angle Projection		Part No.	Double Row S.M.T Type 带外大小柱
			23X2NN3XX1X0
		REV	A

E		Units	mm	Scale	5:1	Drawing By	Date	
D		Tolerance Unless				Lin-Wu	2019/02/13	
C		Otherwise Specified				Reviewed By	Date	
B		.XX ~ ±0.30				YP-Liang	2019/02/13	
A		.XXX ~ ±0.25				Approval By	Date	
REV		Angle ~ ± 3°				Kirby-Xiao	2019/02/13	
1	2	3	4	5	6	7	8	