

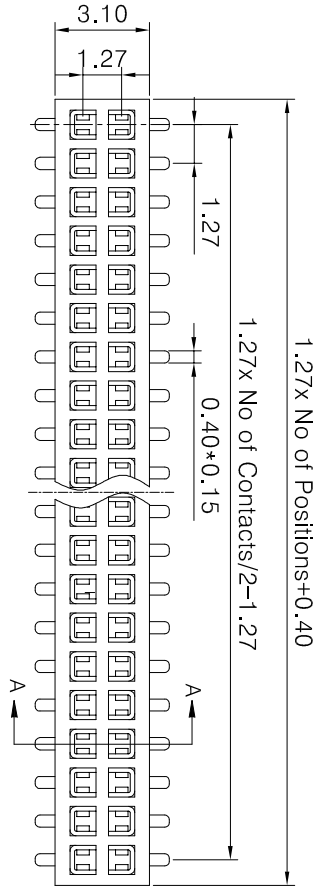
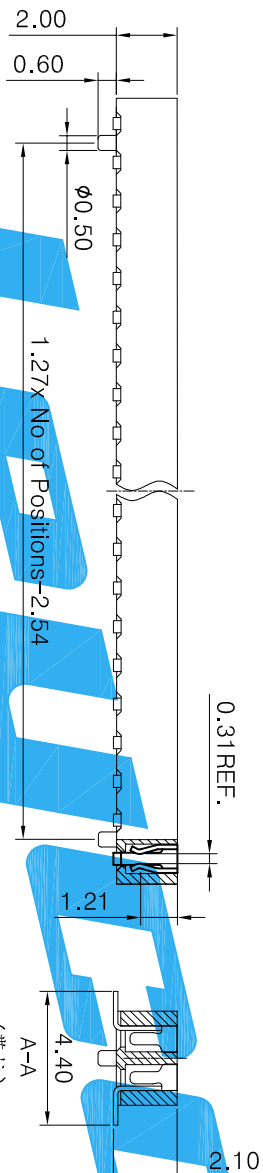


SPECIFICATIONS
Current Rating: 1 Amps
Withstanding Voltage: AC 300V
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃

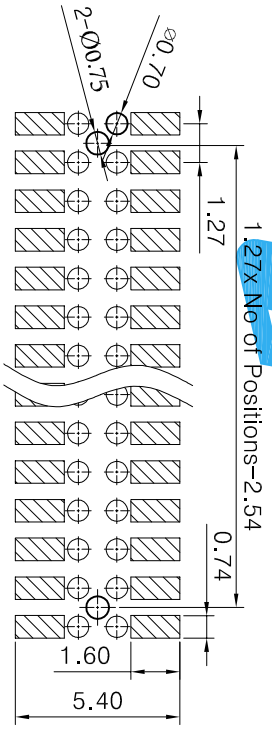

Part Number:

2 3 2 2 NN 5 X X X X 0

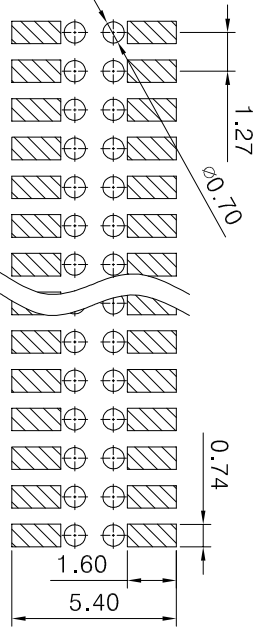

Pitch: 3-1.27mm
Height of Insulator:(mm) 2-2.00
Number of row: 2-Double row
Pin number of each row: 01~50PIN
Type of terminations : 5-Surface mount-perpendicular(On the plug)
Insulator Material : 2-LCP 5-PA6T 9-PA9T
Location Peg , Pick &Place pad Options: 1-Without Location Peg 0-Tin over nickel
Location Peg , Pick &Place pad Options: 1-Without Location Peg 0-Tin over nickel
Plating Code : 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel

ISSUED

leyconn

CONFIDENTIAL

2019-02-14

REV DESCRIPTION. 1 2 3 4

Drawing By Date Units mm Scale 5:1
Lin-Wu 2019/02/14
Reviewed By Date
YP-Liang 2019/02/14
Approval By Date
Kirby-Xiao 2019/02/14

leyconn
Http://www.leyconn.com
Sheet 1 of 1
Title 1.27mm双排上插 Female Header,
H2.0 S.M.T Type
Part No. 2322NN5XXXXX0

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

REV A