



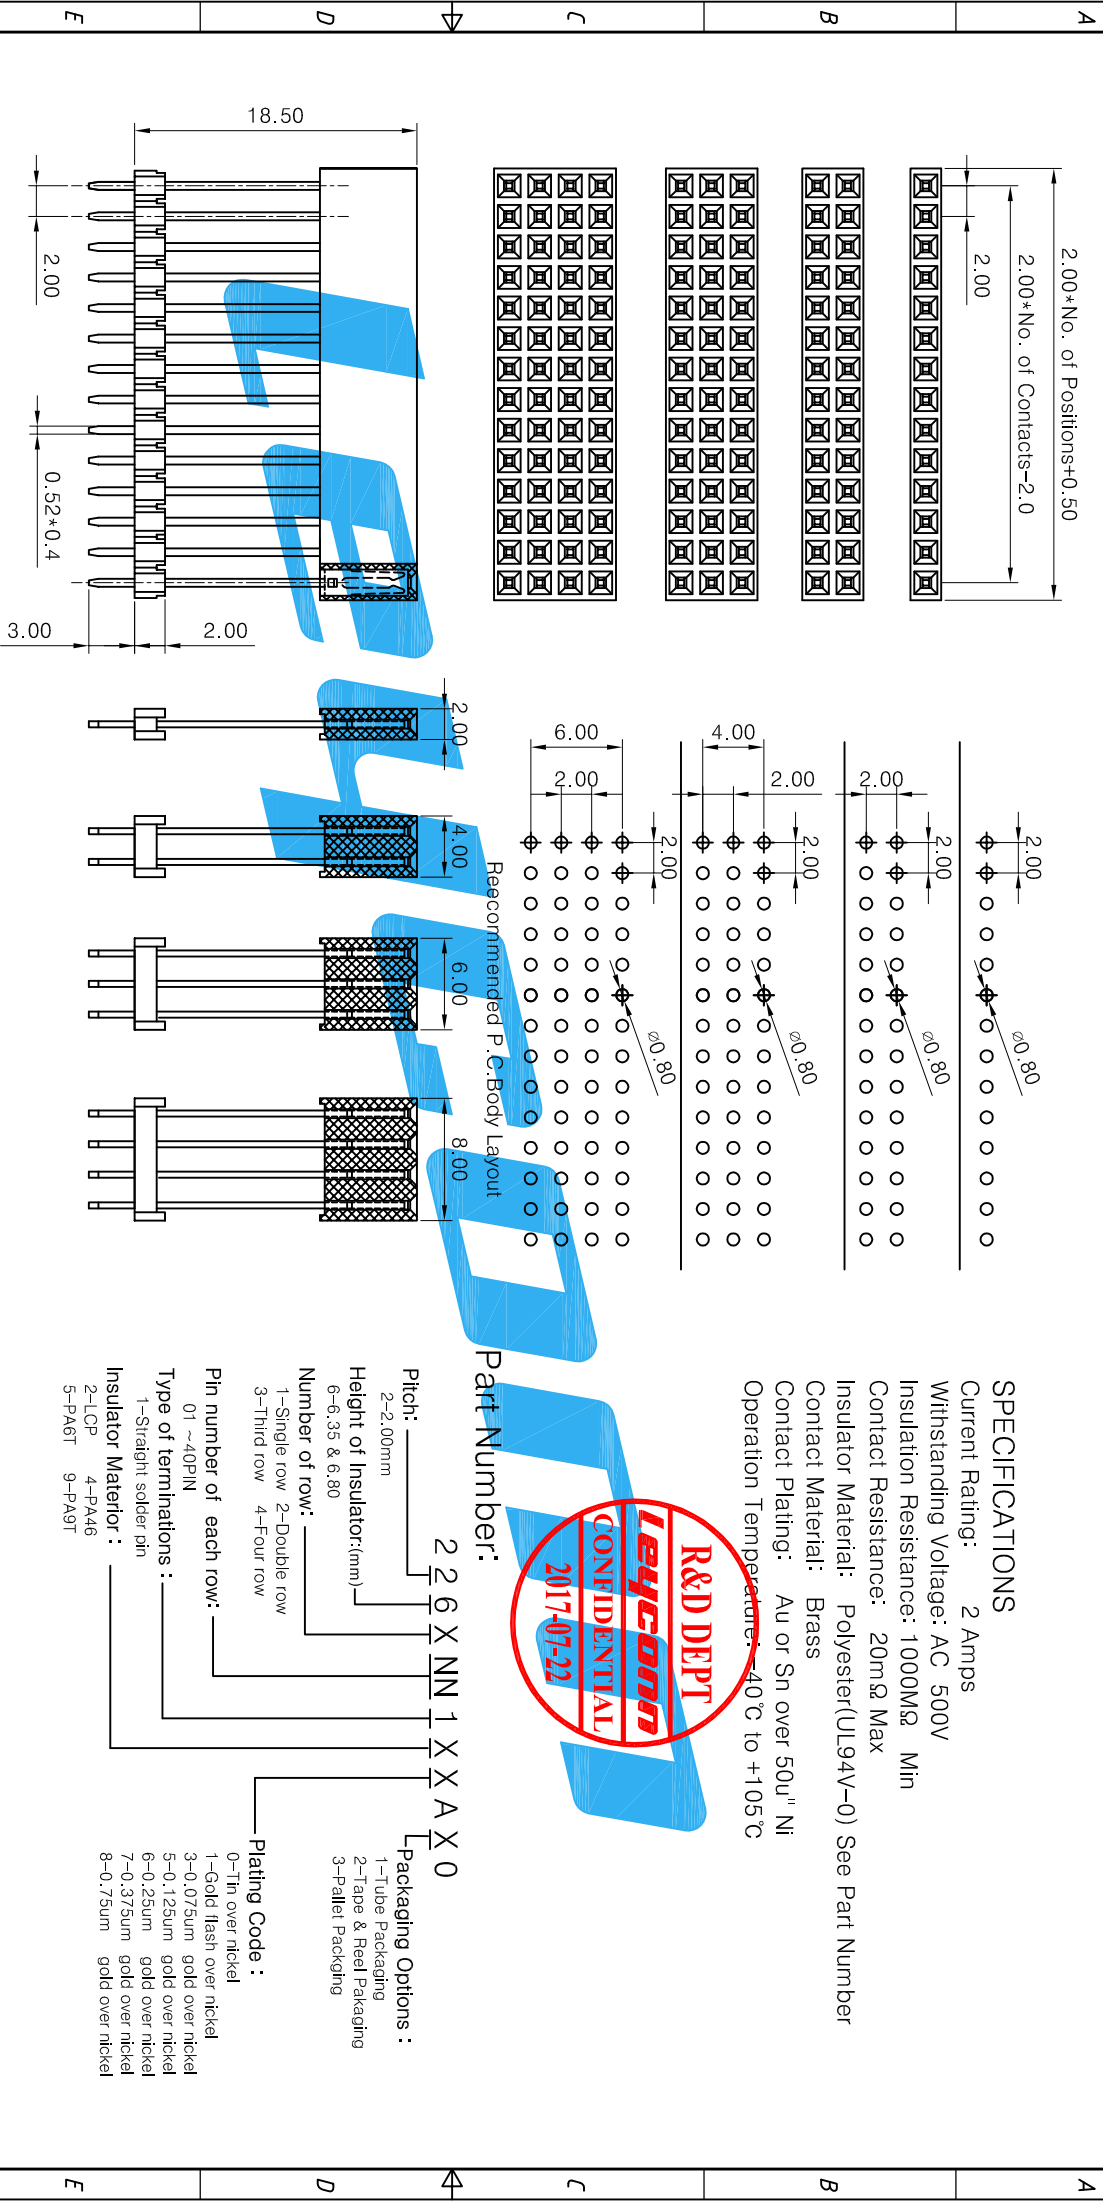

SPECIFICATIONS
Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C



Part Number:

226XNN1XXAX0

- Pitch: 2-2.00mm
Height of Insulator:(mm) 6-6.35 & 6.80
Number of row: 1-Single row 2-Double row 3-Third row 4-Four row
Pin number of each row: 01 ~40PIN
Type of terminations : 1-Straight solder pin
Insulator Material : 2-ICP 4-PA46 5-PA6T 9-PA9T
Plating Code : 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel
Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging 3-Pallet Packaging

Units		mm	Scale	3:1	Drawing By		Date	Kirby-Xiao		Date	2017/07/22	
Tolerance Unless		Otherwise Specified			Reviewed By		Date	Lui-Liu		Date	2017/07/22	
.X ~		± 0.30			Approval By		Date	Darren-Zhang		Date	2017/07/22	
.XXX ~		± 0.20			Third Angle Projection			Part No.		226XNN1XXAX0		
Angle ~		$\pm 3^{\circ}$			Title		2.00mm Female Header PC3.0		Four row H6.35mm DIP Type		REV A	
DESCRIPTION.		Date			REV		1		2		3	
1		2			4		5		6		7	
8												