
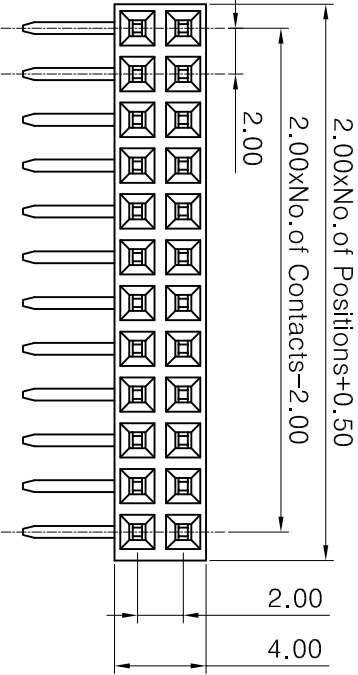
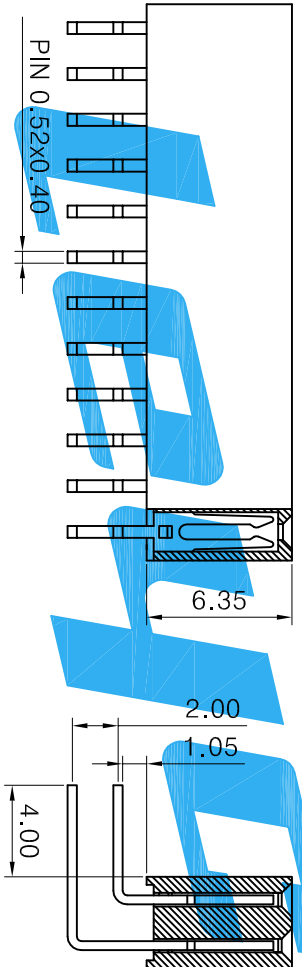


SPECIFICATIONS
Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

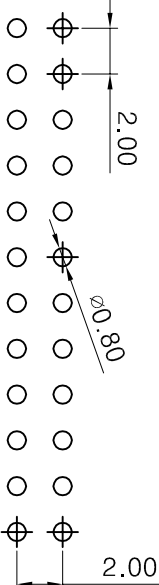

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Part Number:

2 2 6 2 NN 2 X X 0 X 0

- Pitch: 2-2.00mm
Height of Insulator:(mm) 6-6.35
Number of row: 2-Double row
Pin number of each row: 01 ~40PIN
Type of terminations : 2-Right Angle Type
Insulator Material : 1-PBT 2-LCP 4-PA46 5-PA6T
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel
Packing Options : 1-Tube Packaging 3-Pallet Packaging

E		Units	mm	Scale	3:1	Drawing By	Date	leyconn		LEYCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless Otherwise Specified				Lin-Wu	2019/02/14	Http://www.leyconn.com		深圳市联益康电子有限公司
C						Reviewed By	Date	Sheet 1 of 1		
B						YP-Liang	2019/02/14	Title		2.00mm Female Header
A						Approval By	Date	Third Angle Projection		H=6.35mm RA Type
REV		DESCRIPTION.				Kirby-Xiao	2019/02/14	Part No.		2262NN2XX0X0
1	2	3	4	5	6	7	8	REV		A