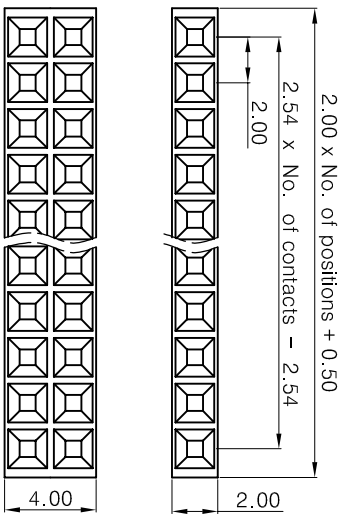


SPECIFICATIONS


Current Rating: 3 Amps
Withstanding Voltage: AC 600V/minute.
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C

Part Number:


2 2 6 X NN 4 X X 0 X 0

- Pitch: 2-2.00mm
Height of Insulator: 6-6.35mm
Number of row: 1-Single row 2-Double row
Pin number of each row: 01 ~40PIN
Type of terminations : 1-Surface mount-parallel
Insulator Material : 2-LCP 5-PA6T 4-PA46 9-PA9T
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel
Packaging Options : 1-Tube Packaging 2-Tape & Reel Packaging 3-Pallet Packaging

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

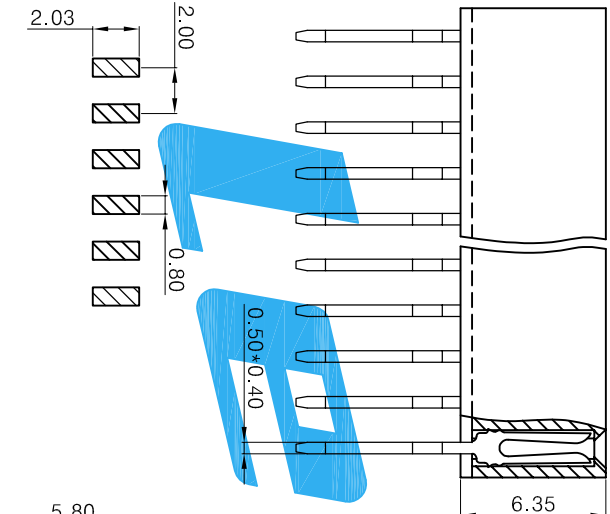

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

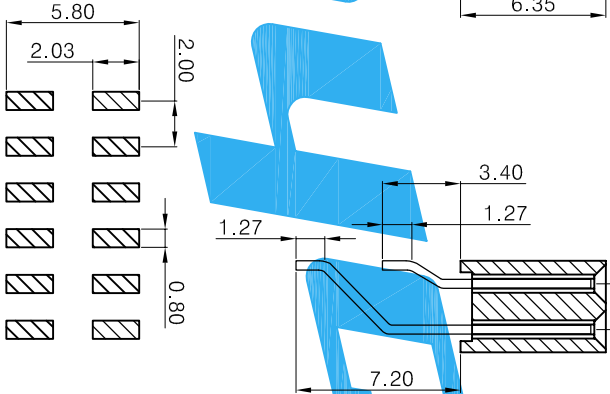

E		Units	mm	Scale	3:1	Drawing By	Hui-Wen	Date	2015/11/19	Leyconn		LEYCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless		Otherwise Specified		Reviewed By	Nick-Yin	Date	2015/11/19	Http://www.leyconn.com		深圳市联益康电子有限公司
C		.X		~ ±0.30						Sheet		1 of 1
B		.XX		~ ±0.25						Title		2.00mm Female Header
A		.XXX		~ ±0.20		Approval By		Date	2015/11/19	Third Angle Projection		H=6.35mm, "Y" SH Type
REV	1	DESCRIPTION.		Date		Kirby-Xiao		2015/11/19			Part No.	226XNN4XX0X0
	1	2		3		4		5		6		7
												8

