
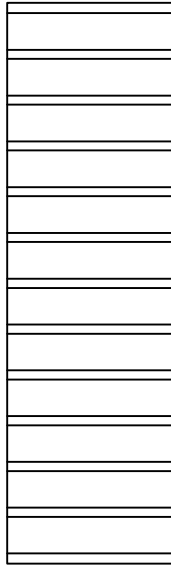
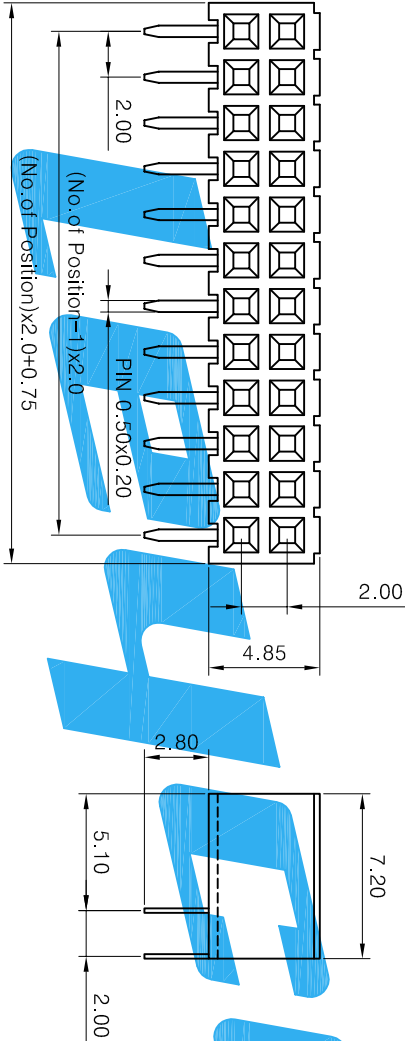


RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50 μ Ni
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Part Number:

2 2 7 2 NN 2 X X 0 X 0

LPackaging Options :

- 1-Tube Packaging
- 3-Pallet Packaging

Plating Code :

- 0-Tin over nickel
- 1-Gold flash over nickel
- 3-0.075um gold over nickel
- 5-0.125um gold over nickel
- 6-0.25um gold over nickel
- 7-0.375um gold over nickel
- 8-0.75um gold over nickel

Pitch: 2-2.00mm
Height of Insulator: 7-7.20mm
Number of row: 2-Double row
Pin number of each row: 01 ~40PIN
Type of terminations : 2 - Right angle Solder
Insulator Material : 2-ICP 5-PA6T 4-PA46 9-PA9T

E		Units	mm	Scale	3:1	Drawing By	Date	Leyconn		LEVYCONN ELECTRONICS CO.,LTD.
D		Tolerance Unless		Drawing By		Date	Lin-Wu		2019/02/14	深圳市联益康电子有限公司
C		Otherwise Specified		Reviewed By		Date	YP-Liang		2019/02/14	TEL: +86(755)26078616 FAX: 26070522
B		.X ~ $\pm$ 0.30		Approval By		Date	Kirby-Xiao		2019/02/14	2.00mm Female Header H7.20
A		.XXX ~ $\pm$ 0.20		Third Angle Projection		Part No.	2272NN2XX0X0		REV	A
REV		DESCRIPTION.		Angle ~ $\pm$ 3 $^{\circ}$						
1		2		3		4		5		8