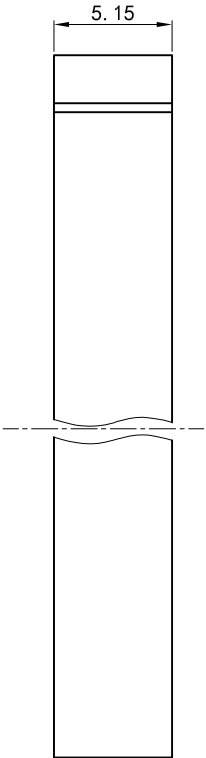
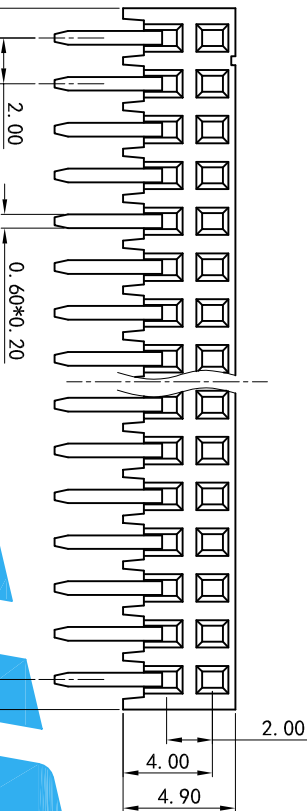


SPECIFICATIONS


Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) , LCP
Contact Material: Phosphor bronze
Contact Plating: Au over 50u" Ni
Operation Temperature: -40°to+105°

Part Number:

2 2 E 2 NN C X X 0 X 0

Pitch: 2-2.00mm
Height of Insulator:(mm) E=5.15
Number of row: 2-Double row
Pin number of each row: 01 ~50PIN
Type of terminations :
Insulator Material : 2-LCP 5-PA6T 9-PA9T
Plating Code :
Plating Options : 1-Tube Packaging 2-Tape & Reel Packaging
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel
A-0.02um gold over nickel
B-0.01um gold over nickel

PCB LAYOUT

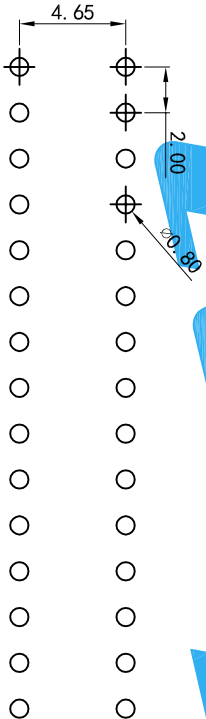

R&D DEPT

LEYCONN

CONFIDENTIAL

2019-02-14

RELEASED

REV	DESCRIPTION.	Date	Angle ~ ± 3°	Units mm	Scale 3:1	Drawing By Lin-Wu	Date 2019/02/14	Revised By YP-Liang	Date 2019/02/14	Sheet 1 of 1	Title FH 2.00 DUAL ROW 90° DIP SIDE INSERT	Part No. 22E2NNCXX0X0	REV A
A	RELEASED	14/02/19	.XXX ~ ±0.20	.XX ~ ±0.30		Approval By Kirby-Xiao	Date 2019/02/14						
B													
C													
D													
E													

LEYCONN

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522