

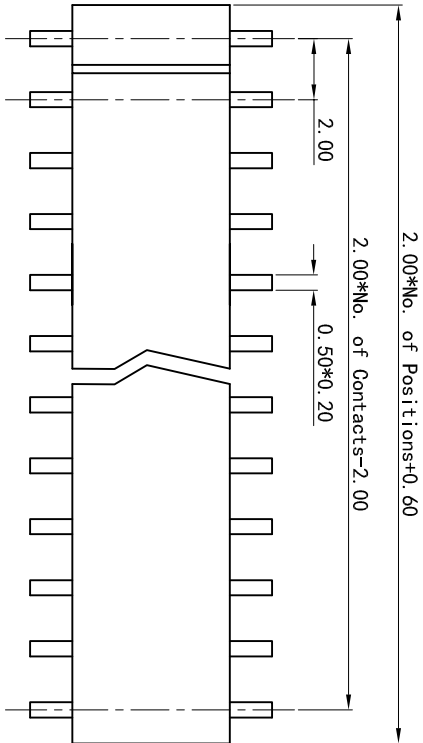
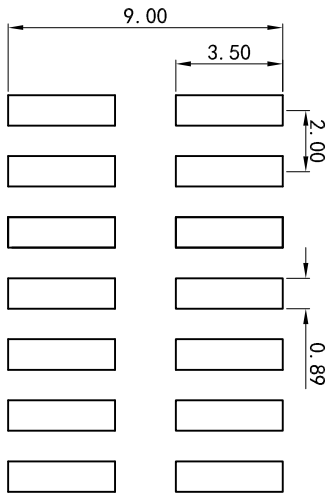




RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



Part Number:

22EXNN3XX0X0

- Pitch: 2.00mm
Height of Insulator: 5.15mm
Number of row: 1-Single row 2-Double row
Pin number of each row: 01~50PIN
Type of terminations: 3-Surface mount-perpendicular
Insulator Material: 2-LCP 5-PA6T 9-PA9T
- Packaging Options: 1-Tube Packaging 2-Tape & Reel Packaging
- Plating Code: 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel A-0.02um gold over nickel B-0.01um gold over nickel

SPECIFICATIONS

- Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0), LCP
Contact Material: Phosphor bronze
Contact Plating: Au over 50u" Ni
Operation Temperature: -40°to+105°



E		Units	mm	Scale	3:1	Drawing By	Date	2019/02/14	Sheet	1 of 1	Title	2.00mm Female Header X*NNP H=5.15mm W=7.93mm SMT Type	REV	A
D						Reviewed By	Date	2019/02/14						
C						Approval By	Date	2019/02/14						
B						Approval By	Date	2019/02/14						
A						Approval By	Date	2019/02/14						
REV						Approval By	Date	2019/02/14						