This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

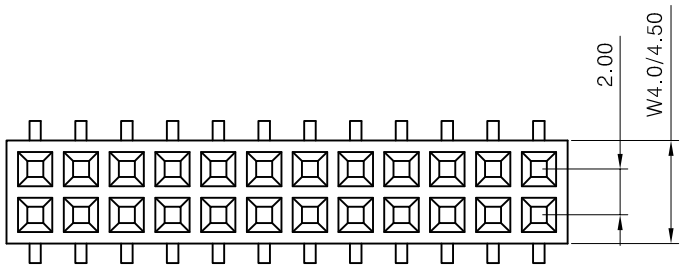



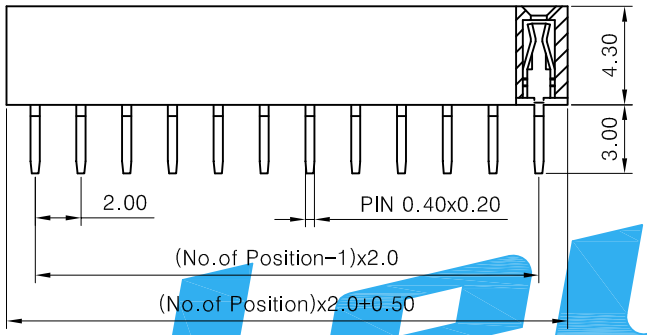



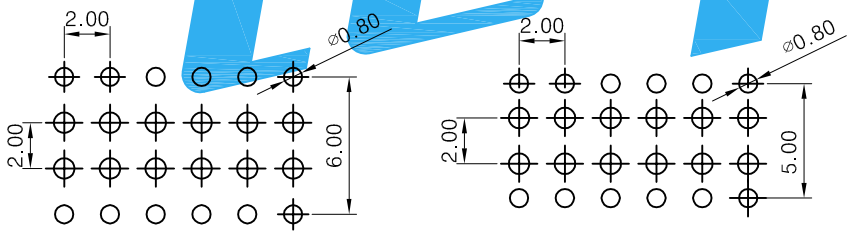

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃

ISSUED
Leyconn
CONFIDENTIAL
2019-02-14

Part Number:

22X2NN7XXXX0

- Pitch: 2-2.00mm
- Height of Insulator: 4-4.30*W4.5 D-4.3*W4.0
- Number of row: 2-Double row
- Pin number of each row: 01 ~40PIN
- Type of terminations : 7-Bottom Entry Type
- Insulator Material : 2-LCP 4-PA46 5-PA6T 9-PA9T
- Plating Code : 0-Tin over nickel; 1-Gold flash over nickel; 3-0.075um gold over nickel; 5-0.125um gold over nickel; 6-0.25um gold over nickel; 7-0.375um gold over nickel; 8-0.75um gold over nickel
- Others: 5-Lead Pitch:5.0; 6-Lead Pitch:6.0
- Packaging Options : 1-Tube Packaging; 3-Pallet Packaging

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	20/10/14

Units: mm | Scale: 3:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	Loek-Wu	2014/10/20
Reviwed By	Kirby-Xiao	2014/10/20
Approval By	Luli-Liu	2014/10/20

Leyconn
Http://www.leyconn.com
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet: 1 of 1
Third Angle Projection

Title: 2.00mm Female Header Bottom Entry Type
Part No.: 22X2NN7XXXX0 REV: A