
This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

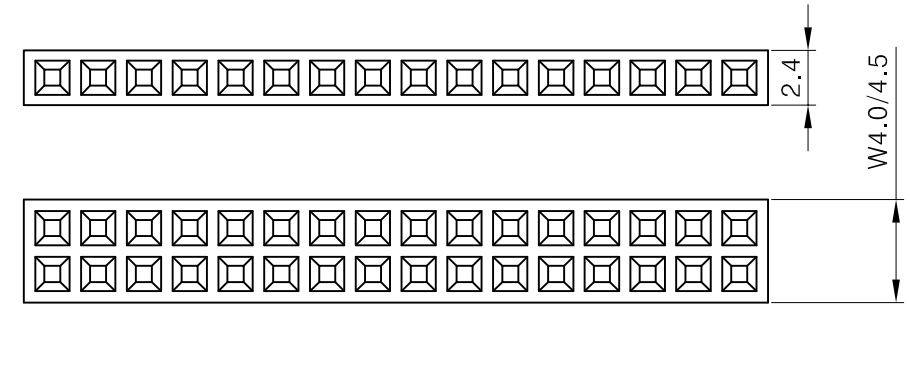


SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃

Part Number:

22XXNN1XXXX0

- Pitch: 2-2.00mm
- Height of Insulator: 4-H4.30*W4.5; D-H4.30*W4.0
- Number of row: 1-Single row 2-Double row
- Pin number of each row: 01 ~40PIN
- Type of terminations: 1-Straight Solder
- Insulator Material: 2-LCP 5-PA6T 4-PA46 9-PA9T
- Plating Code: 0-Tin over nickel; 1-Gold flash over nickel; 3-0.075um gold over nickel; 5-0.125um gold over nickel; 6-0.25um gold over nickel; 7-0.375um gold over nickel; 8-0.75um gold over nickel
- Others: 0-PC2.70; C-PC2.40
- Packaging Options: 1-Tube Packaging; 2-Tape & Reel packaging; 3-Pallet Packaging

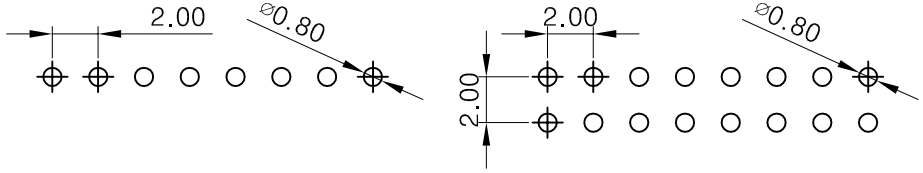

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

ISSUED
Leyconn
CONFIDENTIAL
2019-02-14

E			Units: mm	Scale: 3:1	Drawing By: Lin-Wu	Date: 2019/02/14	LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司
D			Tolerance Unless Otherwise Specified		Reviwed By: YP-Liang	Date: 2019/02/14	Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522
C			.X ~ ±0.30		Approval By: Kirby-Xiao	Date: 2019/02/14	Sheet: 1 of 1
B			.XX ~ ±0.25				Third Angle Projection
A	RELEASED	14/02/19	.XXX ~ ±0.20				Title: 2.00mm Female Header H=4.3mm DIP Type
REV	DESCRIPTION.	Date	Angle ~ ± 3°				Part No.: 22XXNN1XXXX0 REV: A