


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.


RoHS

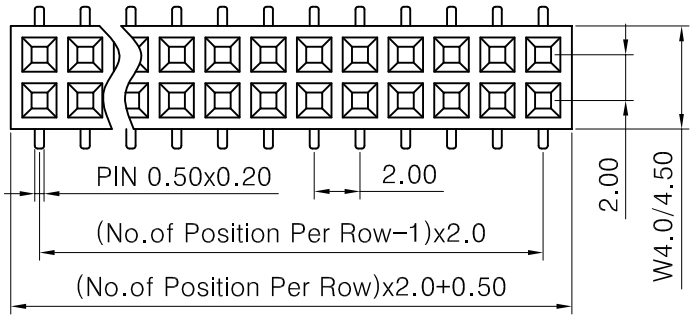






Without Location Peg

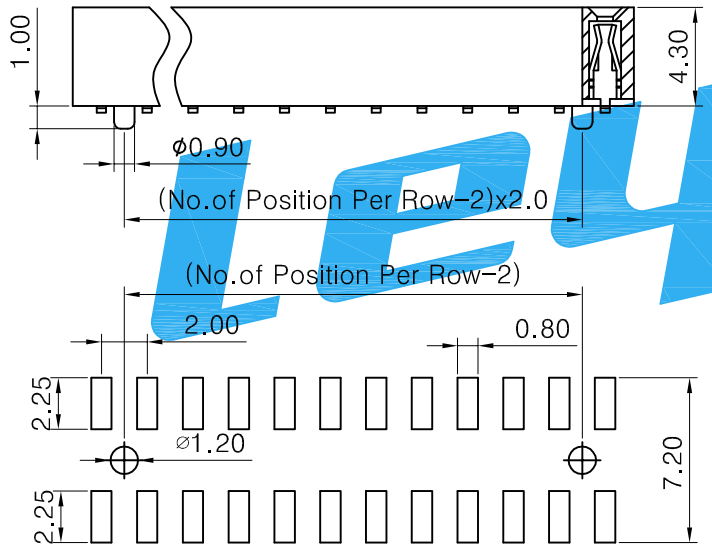

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



With Location Peg

SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°to+105°

Part Number:

2 2 X 2 NN 3 X X X X 0

Pitch:
2-2.00mm
Height of Insulator:
4-H4.30*W4.5
D-H4.30*W4.0
Number of row:
2-Double row
Pin number of each row:
01 ~40PIN
Type of terminations :
3-Surface mount-pendicular
Insulator Material :
2-LCP 5-PA6T 9-PA9T
Packaging Options :
1-Tube Packaging
2-Tape & Reel packaging
Location Peg ,Pick &place pad Options:
0-Without Location Peg
1-With Location Peg
2-Without Location Peg+CAP
3-With Location Peg+CAP
4-With Location Peg+Mylar
Plating Code :
0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel

ISSUED
Leyconn
CONFIDENTIAL
2019-02-14

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	14/02/19

Units mm Scale 3:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	Lin-Wu	2019/02/14
Reviwed By	YP-Liang	2019/02/14
Approval By	Kirby-Xiao	2019/02/14

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title: 2.00mm Female Header H=4.30mm S.M.T Type
Part No.: 2242NN3XXXX0
REV: A