


2.00 * N + 0.30



2.0 * (N - 1)

2.00



2.40

SPECIFICATIONS
Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃

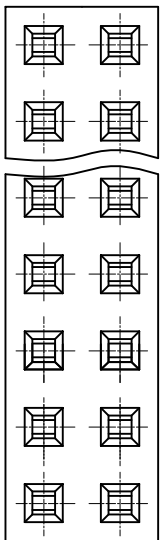

Part Number:

2 2 2 X NN 1 X X 0 X 0

ⓁPackaging Options :

1-Tube Packaging
3-Pallet Packaging

Plating Code :

0-Tin over nickel
1-Gold flash over nickel
3-0.075um gold over nickel
5-0.125um gold over nickel
6-0.25um gold over nickel
7-0.375um gold over nickel
8-0.75um gold over nickel

Pitch: _____
2-2.00mm
Height of Insulator: _____
2-2.20mm

Number of row: _____
1-Single row 2-Double row





Pin number of each row: _____
01 ~ 40PIN

Type of terminations : _____
1 - Straight Solder

Insulator Material : _____
2-LCP 4-PA46
5-PA6T 9-P-PA9T

Recommended PCB Board Layout

Recommended PCB Board Layout

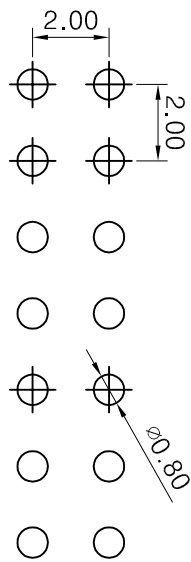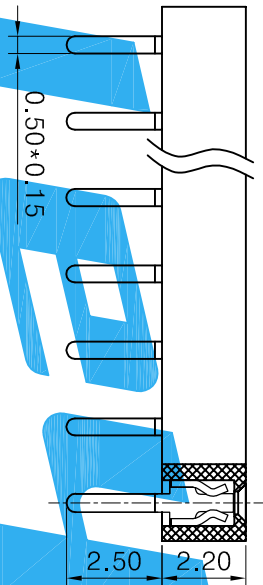

LEYCONN
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522
Http://www.leyconn.com

Sheet 1 of 1

Title

2.00mm Female Header,
H=2.20mm Straight Solder Type PC2.5

Third Angle Projection

Part No.

222XNN1XX0X0

REV A

Units mm Scale 5:1

Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Drawing By Date

Lin-Wu

2019/02/14

Reviewed By Date

YP-Liang

2019/02/14

Approval By Date

Kirby-Xiao

2019/02/14

Units mm Scale 5:1

Tolerance Unless
Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ± 3°

Drawing By Date

Lin-Wu

2019/02/14

Reviewed By Date

YP-Liang

2019/02/14

Approval By Date

Kirby-Xiao

2019/02/14