
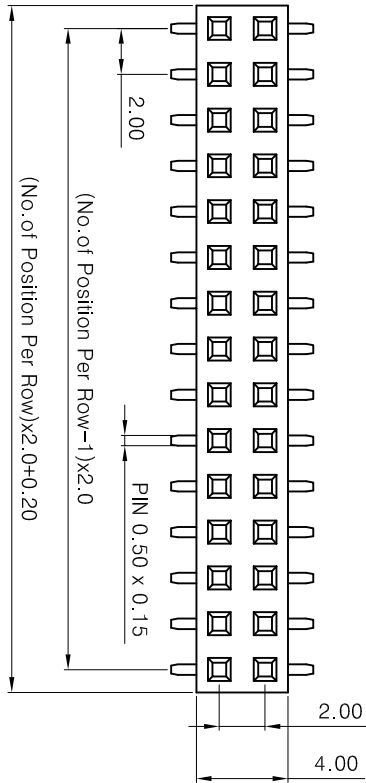




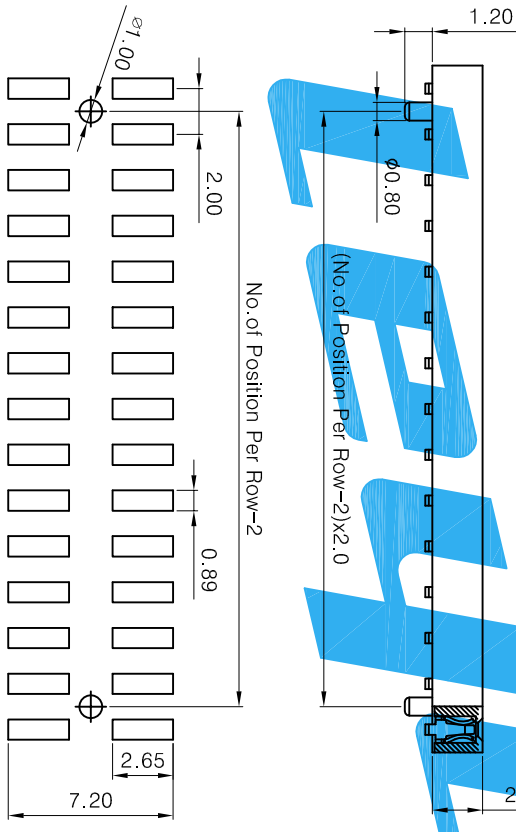

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW


SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50 μ Ni
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Part Number:

2 2 2 2 NN 3 X X X X 0

- Pitch: 2-2.00mm
Height of Insulator: 2-2.20mm
Number of row: 2-Double row
Pin number of each row: 01 ~40PIN
Type of terminations : 3-Surface mount-perpendicular
Insulator Material : 2-LCP 5-PA6T 9-PA9T
Plating Code : 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel
Packaging Options : 1-Tube Packaging 2-Tape & Reel packaging
Location Peg ,Pick &Place pad Options: 0-Without Location Peg 1-With Location Peg 2-Without Location Peg+CAP 3-With Location Peg+CAP 4-With Location Peg+Mylar

E			Units	mm	Scale	3:1	Drawing By	Date	<div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司</div><div>Http://www.leyconn.com</div><div>TEL: +86(755)26078616 FAX: 26070522</div></div>					
D			Tolerance Unless Otherwise Specified				Lin-Wu	2019/02/14						
C							Reviewed By	Date						
B			.X ~ ± 0.30				YP-Liang	2019/02/14	Sheet		1 of 1			
A			.XX ~ ± 0.25				Approval By	Date	Title		2.00 mm Female Header			
REV			.XXX ~ ± 0.20						Third Angle Projection		H=2.20mm Double Row SMT Type			
			Angle ~ ± 3°				Kirby-Xiao	2019/02/14	<div></div>		Part No.	2222NN3XXXX0	REV	A
			DESCRIPTION.											