

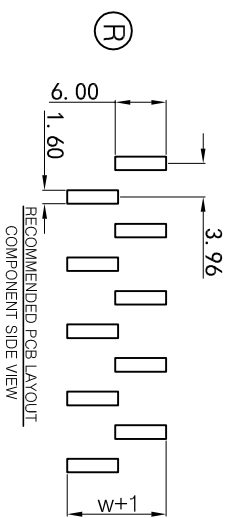

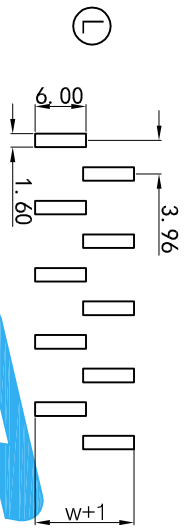


SPECIFICATIONS

- Current Rating:5.0A
- Contact Resistance:20mΩ Max
- Insulation Resistance:1000MΩ Min
- Withstand Voltage:500V AC/minute
- Operation Temperature:-40℃ to +105℃
- Contact Material: Brass
- Contact Plating: Au or Sn over 50μ"Ni
- Insulator Material: Polyester(UL94V-0)

Part Number:



36 1 NN X X X XXX X

Pitch: (Unit:mm) 6 - 3.96

Number of Row: 1 - Single Row

Pin number of each row: 01-20P

Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2 -0.05um gold over nickel

Serial number: Determined by the LEYCONN

Pin Length: 1) XXX-A+H+D+(W-3.96)/2 2) XXX-A+B+D+(W-3.96)/2

Tail & Mounting Style: L - L Type R - R Type

Insulator Material: 2-LCP 4-PA46 5-P-PA6T 9-P-PA9T

E		Units	mm	Scale	3:1	Drawing By	Date	<div><div>leyconn</div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司</div></div> <div>Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522</div>		REV A	
D		Tolerance Unless Otherwise Specified				Reviewed By	Date				
C		.X ~ ±0.30				YP-Liang	2019/03/05	Third Angle Projection		Title	3.96mm Pin Header , Single Row,S.M.T
B		.XX ~ ±0.25				Approval By	Date				
A		.XXX ~ ±0.20				Kirby-Xiao	2019/03/05	Part No.		361NNXXXXXX	REV A
REV		Angle ~ ± 3°									
1		DESCRIPTION.						Date		05/03/19	REV A
2											
3								Date		05/03/19	REV A
4											
5								Date		05/03/05	REV A
6											
7								Date		05/03/05	REV A
8											