



SPECIFICATIONS

Current Rating:5.0A
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating:Au or Sn over 50μ"Ni
Insulator Material:Polyester(UL94V-0)

Part Number:



36 1 NN X X X XXX X
Pitch: (Unit:mm) 6-3.96
Number of Row: 1-Single Row
Pin number of each row: 01-20P
Contact Plated: 0-Tin over nickel, 1-Gold flash over nickel, 3-0.075um gold over nickel, 5-0.125um gold over nickel, 6-0.25um gold over nickel, 7-0.375um gold over nickel, 8-0.75um gold over nickel, A-0.02um gold over nickel, B-0.01um gold over nickel, 2-0.05um gold over nickel
Insulator Material: 1-Straight solder, 2-Right angle solder
Tail & Mounting Style: 1) XXX-A+H+C, 2) XXX-A+B+C, 3) XXX-A+C+D+3.18
Serial number: Determined by the LEYCONN
PIN Length:
Insulator Material: 2-LCP, 4-PA46, 5-PA6T, 9-PA9T

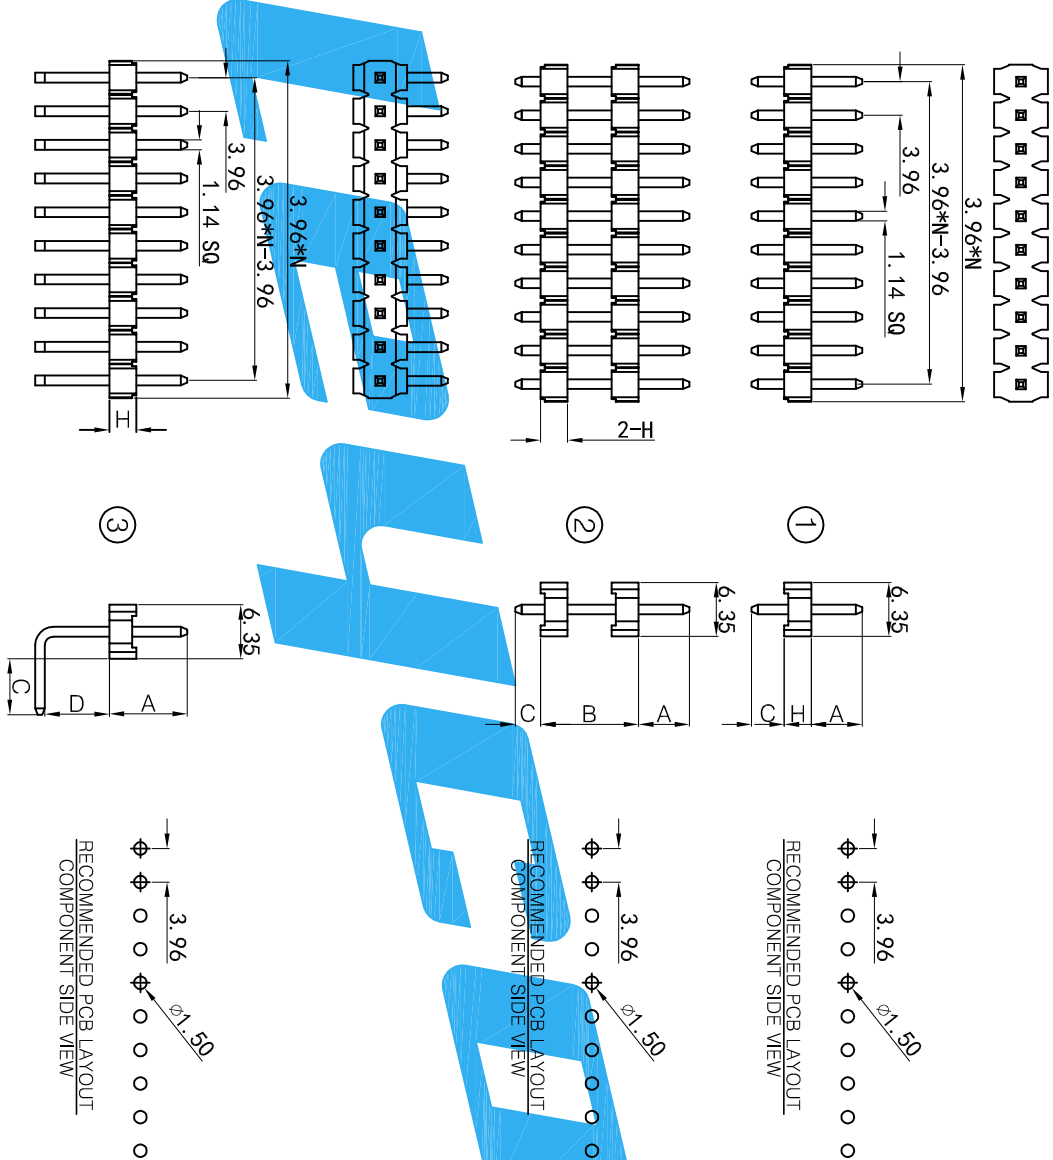

E		Units	mm	Scale	3:1	Drawing By	Date	leyconn Http://www.leyconn.com		LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522	
D		Tolerance Unless Otherwise Specified				Reviewed By	Date				
C		.X ~ ±0.30				YP-Liang	2019/03/05	Sheet	1 of 1	Title	3.96mm Pin Header, Single Row, DIP/S.M.T
B		.XX ~ ±0.25				Approval By	Date	Third Angle Projection		Part No.	361NNXXXXXXX
A		.XXX ~ ±0.20				Kirby-Xiao	2019/03/05				
REV		Angle ~ ± 3°									
1		DESCRIPTION.									
2											
3											
4											
5											
6											
7											
8											