
This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

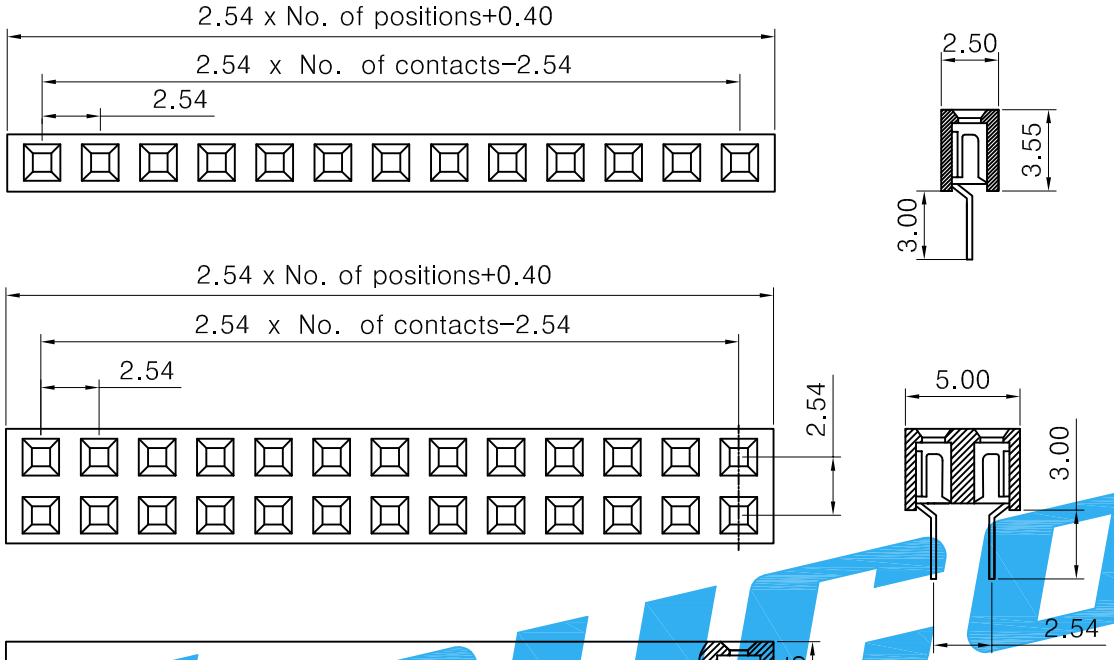

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

SPECIFICATIONS

Current Rating: 3 Amps
Withstanding Voltage: AC 600V/minute.
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40°C to +105°C

Part Number:

2 1 3 X NN 1 X X 0 X 0

- Pitch: 1-2.54mm
- Height of Insulator: 3-3.55mm
- Number of row: 1-Single row 2-Double row
- Pin number of each row: 01 ~40PIN
- Type of terminations : 1-Straight solder
- Insulator Material : 2-LCP 4-PA46 5-PA6T 9-PA9T
- Plating Code : 0-Tin over nickel; 1-Gold flash over nickel; 3-0.075um gold over nickel; 5-0.125um gold over nickel; 6-0.25um gold over nickel; 7-0.375um gold over nickel; 8-0.75um gold over nickel; A-0.02um gold over nickel; B-0.01um gold over nickel
- Location Peg ,Pick &place pad Options:
- Packaging Options : 1-Tube Packaging; 2-Tape & Reel Packaging; 3-Pallet Packaging

ISSUED
Leyconn
CONFIDENTIAL
2017-06-01

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	01/06/17

Units	mm	Scale	3:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	Date
Lin-Wu	2017/06/01
Reviwed By	Date
YP-Liang	2017/06/01
Approval By	Date
Kirby-Xiao	2017/06/01

Leyconn
Http://www.leyconn.com
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet	1 of 1	Title	2.54mm Female Heade, H=3.55mm,PIN=Type"U"单双排DIP
Third Angle Projection		Part No.	213XNN1XX0X0 REV A