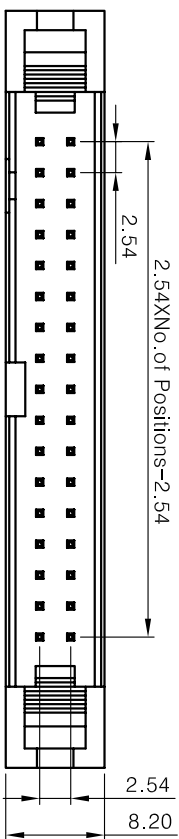
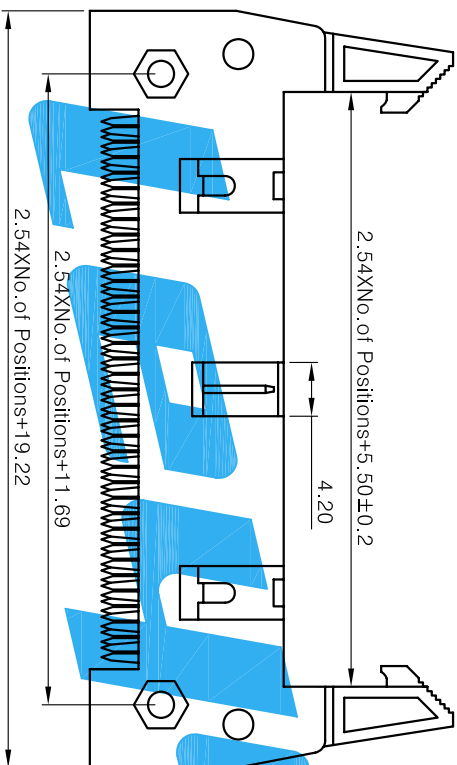


Electrical Data:

Current rating: 3A
Dielectric Withstanding Voltage: 600V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Brass
Contacts plating: Au or Sn over 40u" Ni
☐四方针的规格: 0.64x1 6.0mm & 0.64x21.0mm

Part Number:

391 NN 0 5 X 1 2 0 0

Pitch:

1-2.54x2.54mm

Number of Contact:

10 ~ 64 PIN

Type of terminations:

5 - Flat Cable-IDC

Contact Plated:

0-Tin 1-Gold 3u"
5-Gold 5u" 6-Gold 10u" 7-Gold 15u"
8-Gold 30u"

Insulator Material:

1-PBT

Insulator Color:

2-Grey

ISSUED

LEYCONN
CONFIDENTIAL

2013-06-01

E		Units	mm	Scale	2:1	Drawing By	Date	Sheet	1 of 1	Title	2.54mm Flat Cable-IDC Ejector Header
D		Tolerance Unless Otherwise Specified				Kirby-Xiao	2013/06/01	Http://www.leyconn.com		LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司	
C						Reviewed By	Date				
B						Luli-Liu	2013/06/01				
A		RELEASED				Approval By	Date				
REV		DESCRIPTION.				Darren-Zhang	2013/06/01	Third Angle Projection		Part No.	391NN05X1200

1

2

3

4

5

6

7

8

