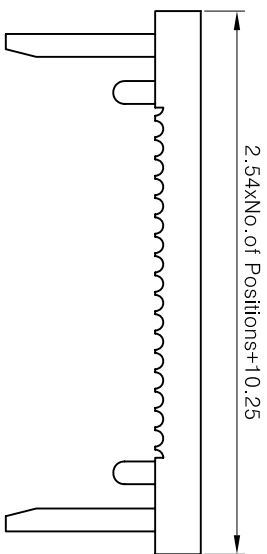

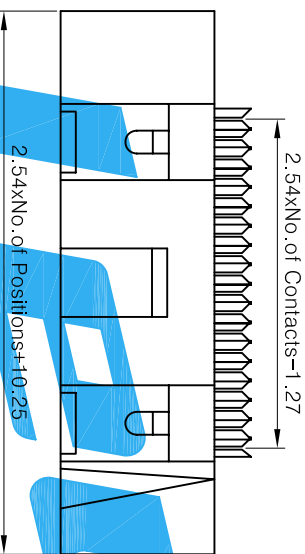


Electrical Data:

Current rating: 3A
Dielectric Withstanding Voltage: 600V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze of copper alloy
Contacts plating: Selective gold on surface contact area

Part Number:

301 NN 0 5 X 1 2 0 0

Pitch: _____
1-2.54x2.54mm
Number of Contact: _____
10 ~ 64 PIN
Type of terminations: _____
5 - Flat Cable-IDC Type
Contact Plated: _____
0-Tin 1-Gold Flash 3-Gold 3u"
5-Gold 5u" 6-Gold 10u" 7-Gold 15u"
8-Gold 30u"
Insulator Material: _____
1-PBT
Insulator Color: _____
2-Grey

ISSUED
leyconn
CONFIDENTIAL

2013-06-01

leyconn

http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title Flat Cable-IDC Box Header
Part No. 301NN05X1200

Units	mm	Scale	3:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	Date
Kirby-Xiao	2013/06/01
Reviewed By	Date
Luli-Liu	2013/06/01
Approval By	Date
Darren-Zhang	2013/06/01

REV	DESCRIPTION	DATE
A	RELEASED	01/06/13
1		