
This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

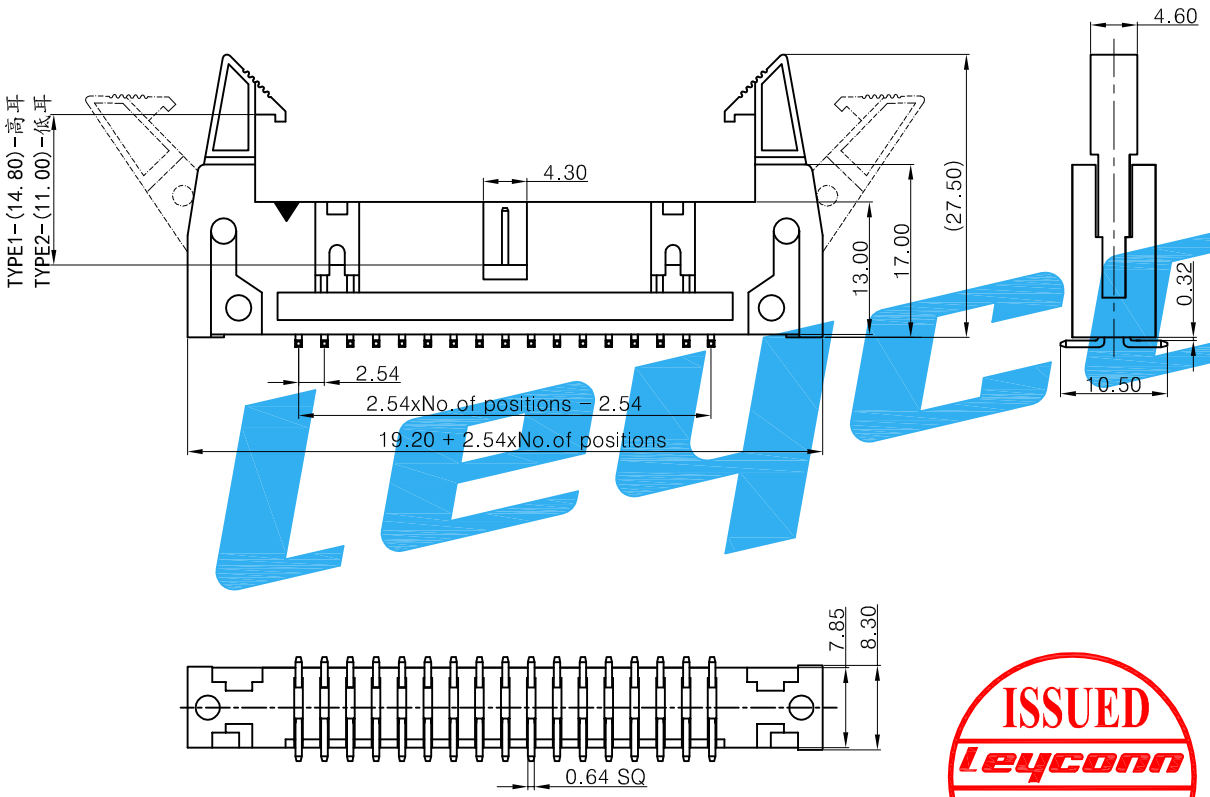

Electrical Data:

Current rating: 3A
Dieltric Withstanding Voltage: 600V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: −40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammalility Rating: UL 94V-0
Contacts: Brass
Contacts plating: Au or Sn over 40u" Ni
□四方针的规格：0.64x16.0mm

Part Number:

391 NN 0 3 X X 1 X 0

- Pitch:(Unit:mm) — 1-2.54x2.54
- Number of Contact: — 10 ~ 64 PIN
- Type ofterminations: — 3 - S.M.T Type
- Contact Plated: — 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"
- Insulator Material: — 1-PBT 4-PA46 5-PA6T 9-PA9T
- Insulator Color: — 1-Black
- Others: — 0-TYPE1 1-TYPE2

ISSUED
Leyconn
CONFIDENTIAL
2019-04-03

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	18/04/19

Units: mm | Scale: 3:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

		Date
Drawing By	yp-Liang	2019/04/18
Reviwed By	Lin-Wu	2019/04/18
Approval By	Kirby-Xiao	2019/04/18

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title: Ejector Header Connector Pitch:2.54mm S.M.T Type
Part No.: 391NN03XX1X0 REV A