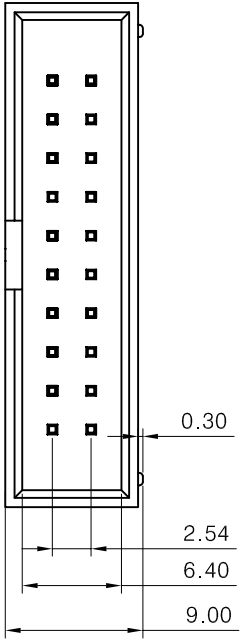
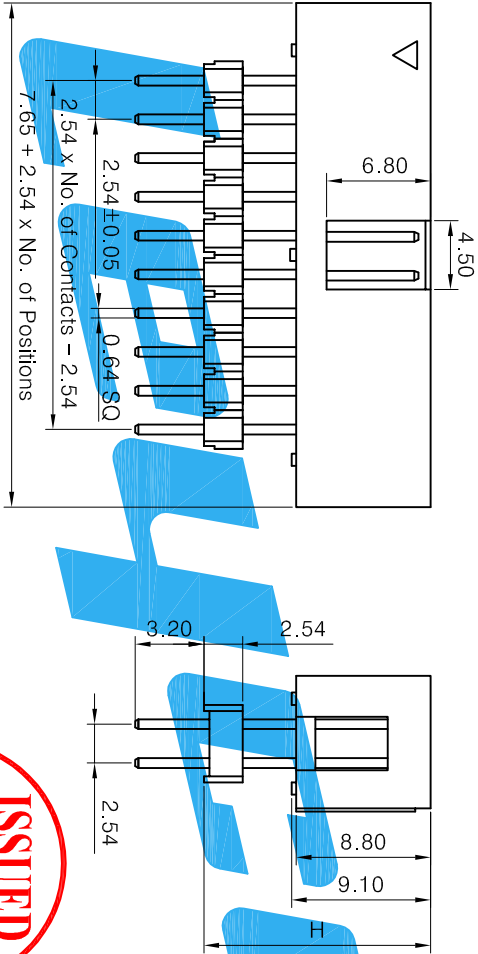



Electrical Data:
Current rating: 3A
Dielectric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:
Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Brass
Contacts plating: Au or Sn over 50μ"Ni

Part Number:

301 NN 1 XXX X X 0

Pitch: _____
1-2.54X2.54mm
Number of Contact: _____
10 ~ 64 PIN
Type of terminations: _____
1 - Straight DIP Type
Height: _____
XXX-XX.X mm (119-11.9mm)
Contact Plated: _____
0-Tin 1-Gold Flash 3-Gold 3u"
5-Gold 5u" 6-Gold 10u" 7-Gold 15u"
8-Gold 30u"
Insulator Color: _____
1-Black



E		Units	mm	Scale	2:1	Drawing By	Date	yp-Liang	2019/04/03	Sheet	1 of 1	Title	BOX Header Connector	Part No.	301 NN1 XXXXX0	REV	A
D		Tolerance Unless				Reviewed By	Date	Nick-Yin	2019/04/03	Third Angle Projection		Pitch: 2.54mm DIP Type					
C		Otherwise Specified															
B		.X ~ ±0.30															
A		.XX ~ ±0.25															
REV		.XXX ~ ±0.20															
1		Angle ~ ±3°				Approval By	Date	Kirby-Xiao	2019/04/03								
2																	
3																	
4																	
5																	
6																	
7																	
8																	