

Pos.	DIM.A	DIM.B	DIM.C	DIM.D
6	12.32	6.35	5.08	12.12
8	14.96	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
28	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.80
34	47.88	41.91	40.64	47.68
36	50.42	44.45	43.18	50.22
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	68.40
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

Construction:

Insulator: PBT+Glass Fiber (UL94V-0)Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze of copper alloy
Contacts plating: Selective gold on surface contact area

Electrical Data:

Current rating: 1Amps
Dielectric Withstanding Voltage: 500VAC for one minute
Contact Resistance: < 10 mΩ
Insulation Resistance: < 100 MΩ
Operating Temperature: -40°C ~ +105°C

Part Number:

201 NN 0 5 X X X 0 0




Pitch:(Unit:mm) 1-2.54X2.54, Insulator Color: 1-Black

Number of Contact: 06 ~ 64 PIN

Type ofterminals: 5 - Flat Cable-IDC Type / IDC Insulator Material: 1-PBT

Contact Plated:

0-Tin 1-Gold Flash
2-Gold 3u" 5-Gold 5u"
6-Gold 10u" 7-Gold 15u"
8-Gold 30u"

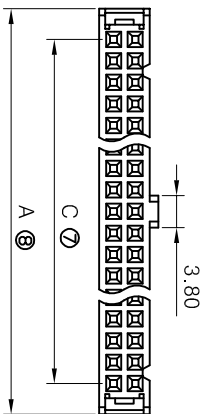

leyconn

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Units mm Scale 4:1
Tolerance Unless
Otherwise Specified

Drawing By Hui-Wen Date 2019/04/03
Reviewed By Loek-Wu Date 2019/04/03

Http://www.leyconn.com
Sheet 1 of 1

Third Angle Projection
Title I.D.C Connector Pitch:2.54mm
Part No. 201NN05XXXX0

Angle ~ ± 3°

Approval By Kirby-Xiao Date 2019/04/03

Released 03/04/19
XXX ~ ±0.20

REV A

DESCRIPTION.

1 2 3 4 5 6 7 8