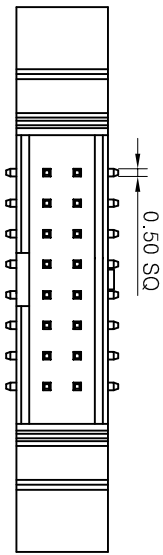
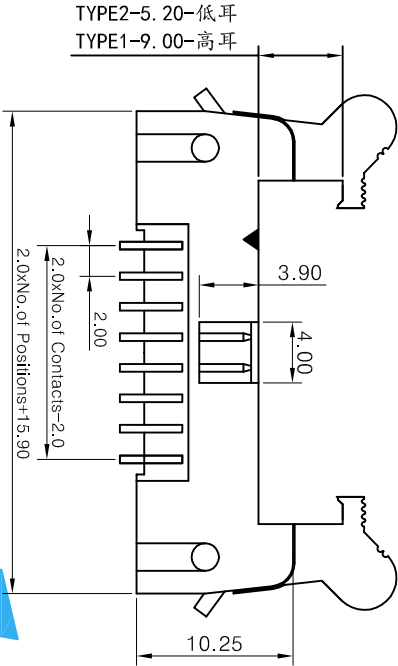
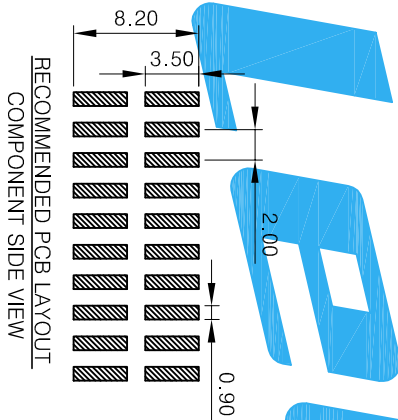


Electrical Data:
Current rating: 2A
Dielectric Withstanding Voltage: 300V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:
Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Brass
Contacts plating: Au or Sn over 40u" Ni
四方针的规格: 0.50x10.5mm

Part Number:
392 NN 0 3 X X 1 X 0
Pitch:(Unit:mm) 2-2.00x2.00
Number of Contact: 10 ~ 64 PIN
Type of termination: 3 - S.M.T Type
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"
Insulator Material: 4-PA46 5-PA6T 9-PA9T
Insulator Color: 1-Black
Others: 0-Type1 (高耳) 1-Type2 (低耳)

E		Units	mm	Scale	2:1	Drawing By	Date	Sheet	1 of 1	Title	BOX Header Connector	REV	A
D		Tolerance Unless				Lin-Wu	2019/04/20	Http://www.leyconn.com		深圳市联益康电子有限公司			
C		Otherwise Specified				Reviewed By	Date	Third Angle Projection		TEL: +86(755)26078616			
B		.X ~ ±0.30				YP-Liang	2019/04/20			FAX: 26070522			
A		.XX ~ ±0.25				Approval By	Date				Pitch:2.00 mm,SMT Type		
REV		.XXX ~ ±0.20				Kirby-Xiao	2019/04/20						
1	2	3	4	5	6	7	8						