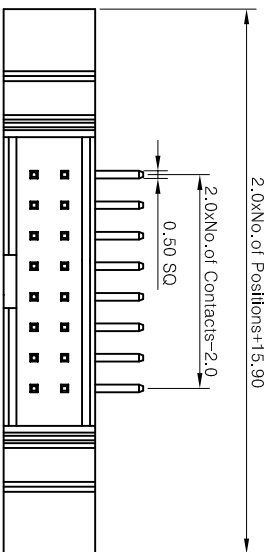
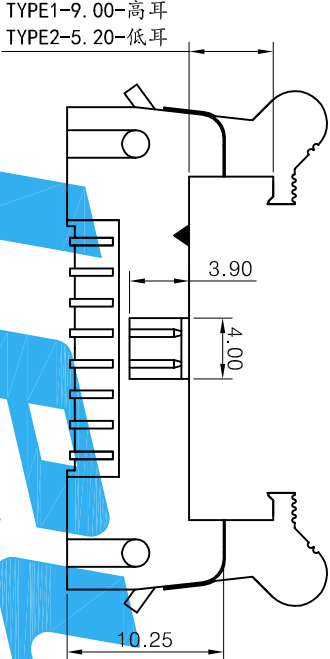


Electrical Data:

Current rating: 2A
Dielectric Withstanding Voltage: 300V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Brass
Contacts-plating: Au or Sn over 40u" Ni

Part Number:

392 NN 0 2 X X 1 X 0

Pitch:(Unit:mm) 2-2.00x2.00
Number of Contact: 10 ~ 64 PIN
Type ofterminations: 2 - Right Angle Type
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"
Insulator Material: 4-PA46 5-PA6T 9-PA9T
Insulator Color: 1-Black
Others: 0-Type1 (高耳) 1-Type2 (低耳)



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Http://www.leyconn.com
Sheet 1 of 1
Title BOX Header Connector
Pitch:2.00 mm,RA Type
Part No. 392NN02XX1X0
REV A

E	Units	mm	Scale	2:1
D	Tolerance Unless			
C	Otherwise Specified			
B	.X ~ ±0.30			
A	.XX ~ ±0.25			
REV	DESCRIPTION.	Date	Angle ~ ± 3°	

Drawing By	Date
Lin-Wu	2019/04/20
Reviewed By	Date
YP-Liang	2019/04/20
Approval By	Date
Kirby-Xiao	2019/04/20

Third Angle Projection	Part No.	REV
⊕	392NN02XX1X0	A