

Electrical Data:

Current rating: 2A
Dielectric Withstanding Voltage: 500V AC for one minute
Contact Resistance: < 30 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C





Construction:

Insulator: PA6T, Black
Flammability Rating: UL 94V-0
Contacts: Brass
Contacts plating: Au over 60u" Ni

Part Number:

302 NN 1 XXX X X 0

Pitch: 2-2.00x2.00mm
Number of Contact: 10 ~ 64 PIN
Type ofterminations: 1 - Straight DIP Type
Height: XXX-XX.X mm (119-11.9mm)
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"
Insulator Color: 1-Black

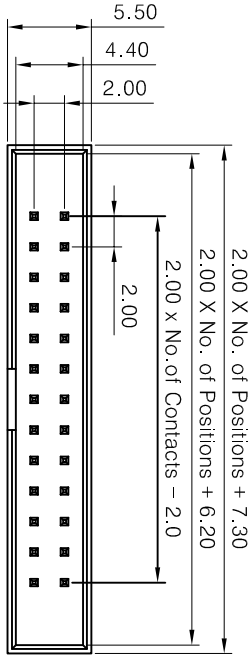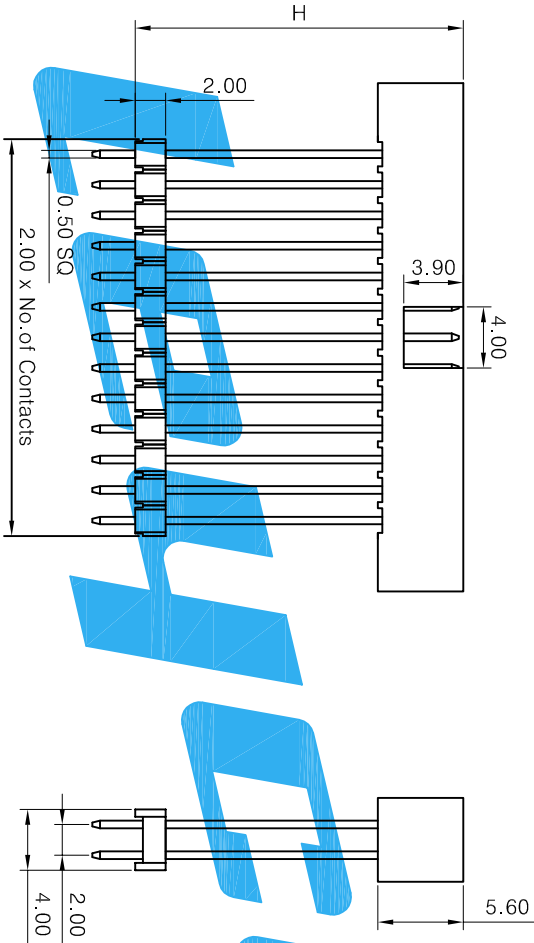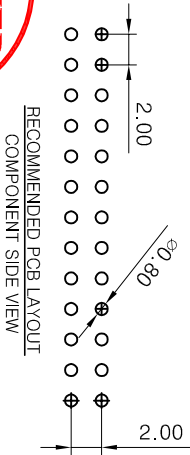

E		Units	mm	Scale	3:1	Drawing By	Date	Sheet		1 of 1	Title	2.00 BOX Header, Straight
D		Tolerance Unless				yp-Liang	2019/04/03	Http://www.leyconn.com		LEYCONN ELECTRONICS CO.,LTD.		
C		Otherwise Specified				Revised By	Date	Third Angle Projection		深圳市联益康电子有限公司		
B		.X ~ ±0.30				Nick-Yin	2019/04/03	1 of 1		TEL: +86(755)26078616 FAX: 26070522		
A		.XXX ~ ±0.20				Approval By	Date	Part No.		302NN1XXXXX0		
REV		Angle ~ ± 3°				Kirby-Xiao	2019/04/03	REV		A		
1		DESCRIPTION.				Date		REV		A		