This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

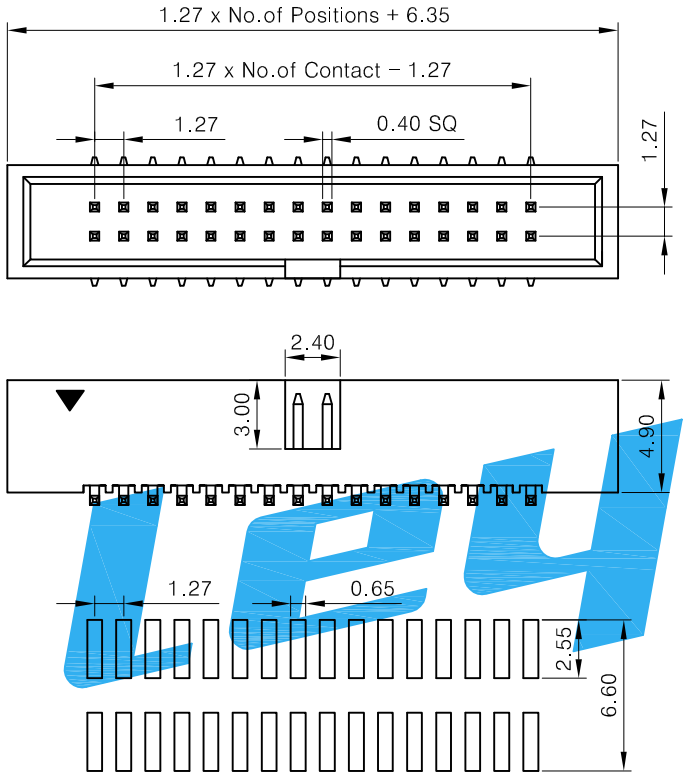

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



Electrical Data:

Current rating: 1A
Dieltric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: −40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammalility Rating: UL 94V-0
Contacts: copper alloy
Contacts plating: Au or Tin over Nickel
□四方针的规格：0.40x6.6mm

Part Number:

303 NN 0 3 X X X 3 0

Pitch:(Unit:mm)
3-1.27x1.27
Number of Contact:
10 ~ 64 PIN
Type ofterminations:
3 - S.M.T Type
Insulator Color:
1-Black
Insulator Material:
2-LCP 5-PA6T 9-PA9T
Contact Plated:
0-Tin 1-Gold Flash 3-Gold 3u"
5-Gold 5u" 6-Gold 10u" 7-Gold 15u"
8-Gold 30u"

ISSUED
Leyconn
CONFIDENTIAL
2019-04-03

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	03/04/19

Units	mm	Scale	3:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	Date
yp-Liang	2019/04/03
Reviwed By	Date
Luli-Liu	2019/04/03
Approval By	Date
Darren-Zhang	2019/04/03

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet	1 of 1	Title	BOX Header Connector Pitch:1.27mm SMT Type(中间开口)
Third Angle Projection		Part No.	303NN01XXX30
		REV	A