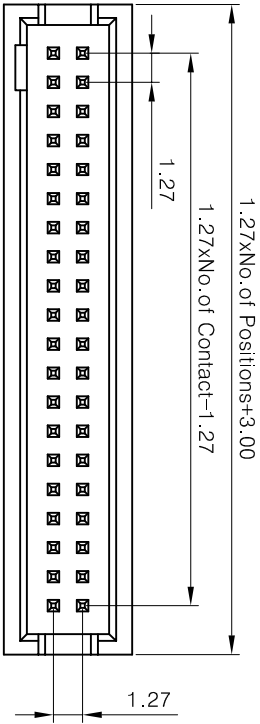
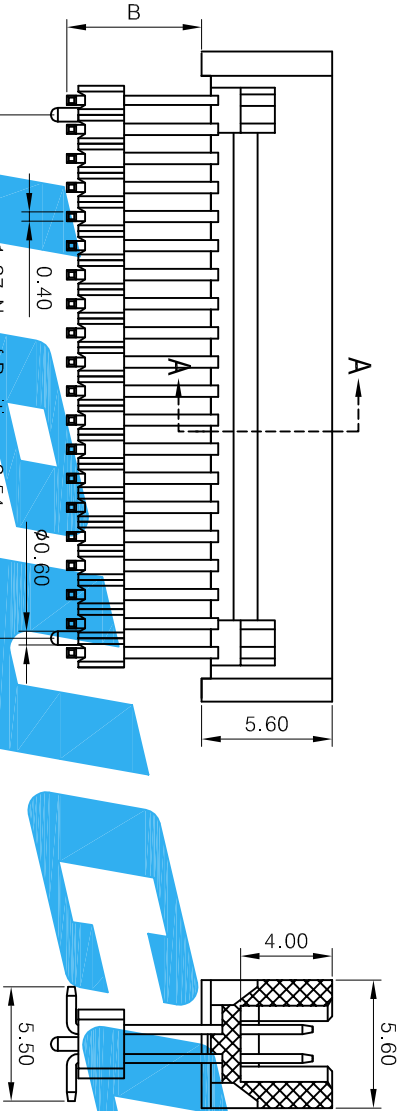


RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Electrical Data:
Current rating: 1A
Dielectric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:
Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Phosphor Brass
Contact Plating: Au or Sn over 50u"Ni

Part Number:

303 NN 0 3 X X 1 X 0

Pitch:(Unit:mm) 3-1.27x1.27
Number of Contact: 10 ~ 64 PIN
Type of terminations: 3 - S.M.T Type
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 30u" 5-Gold 50u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"
Insulator Color: 1-Black
Insulator Material: 5-PA6T 9-PA9T



leyconn LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1 Title BOX Header Connector
Third Angle Projection Part No. 303NN03XX1X0

Units	mm	Scale	2:1
Tolerance Unless	Otherwise Specified		
Revised By	Date		
yp-Liang	2019/04/03		
Revised By	Date		
Luli-Liu	2019/04/03		
Approval By	Date		
Darren-Zhang	2019/04/03		

E			
D			
C			
B			
A			
REV	DESCRIPTION.	Date	Angle ~ ± 3°

1

2

3

4

5

6

7

8