


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

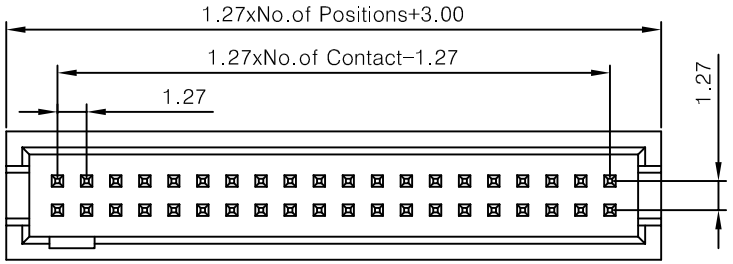

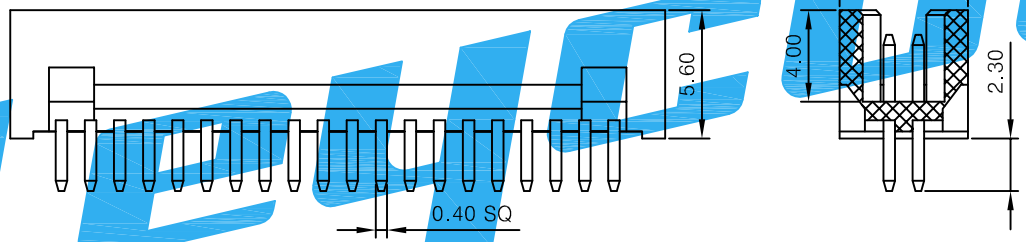

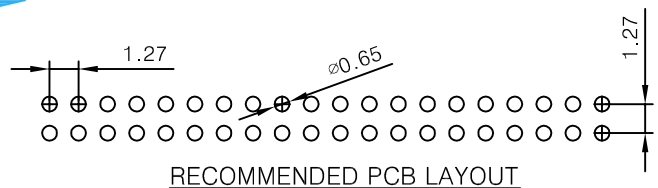

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Electrical Data:

Current rating: 1A
Dieltric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
Flammalility Rating: UL 94V-0
Contacts: Phosphor Brass
Contacts plating: Au or Sn over Nickel
□四方针的规格：0.40x6.6mm

Part Number:

303 NN 0 1 X X 1 1 0

Pitch:(Unit:mm)
3-1.27x1.27
Number of Contact:
10 ~ 64 PIN
Type oftermination s:
1 - Straight DIP Type
Insulator Color:
1-Black
Insulator Material:
4-PA46 5-PA6T 9-PA9T
Contact Plated:
0-Tin 1-Gold Flash 3-Gold 3u"
5-Gold 5u" 6-Gold 10u" 7-Gold 15u"
8-Gold 30u" A-Gold 0.8u"

ISSUED
Leyconn
CONFIDENTIAL
2019-04-03

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	03/04/19

Units	mm	Scale	4:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	yp-Liang	Date 2019/04/03
Reviwed By	Luli-Liu	Date 2019/04/03
Approval By	Darren-Zhang	Date 2019/04/03

Leyconn
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Third Angle Projection

Title: BOX Header Connector Pitch:1.27mm,DIP Type
Part No. 303NN01XX110 REV A