

Electrical Data:
Current rating: 1A
Dielectric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C





Construction:

Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Phosphor Brass
Contacts plating: Au or Tin over Nickel


Part Number:

393 NN 0 1 X X X 00

Pitch:(Unit:mm) 3-1.27x1.27
Number of Contact: 10 ~ 64 PIN
Type of terminations: 1 - Straight DIP Type
Insulator Color: 1-Black
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"

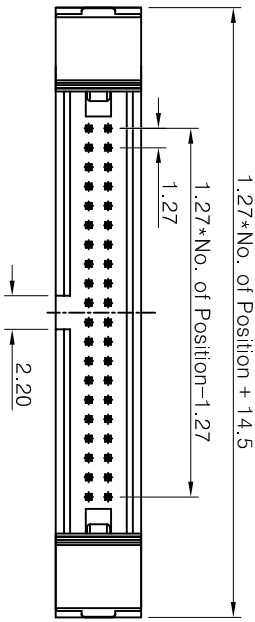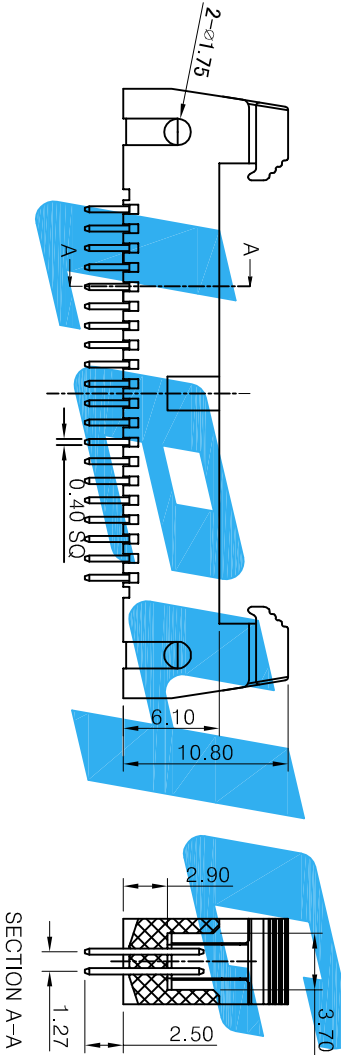


E		Units	mm	Scale	2:1	Drawing By	Date	yp-Liang	2019/04/03	Sheet	1 of 1	Title	Ejector Header Connector
D		Tolerance Unless	Otherwise Specified			Reviewed By	Date	Luli-Liu	2019/04/03	Third Angle Projection		Part No.	393NN01XXXX00
C													
B													
A													
REV		DESCRIPTION.											

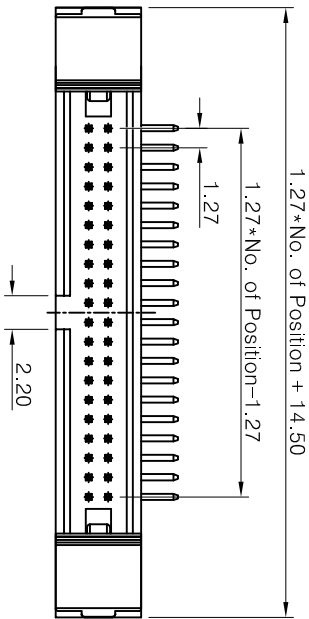

Electrical Data:
Current rating: 1A
Dielectric Withstanding Voltage: 1000V AC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40°C ~ +105°C


Construction:
Insulator: Black Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Phosphor Brass
Contacts plating: Au or Tin over Nickel

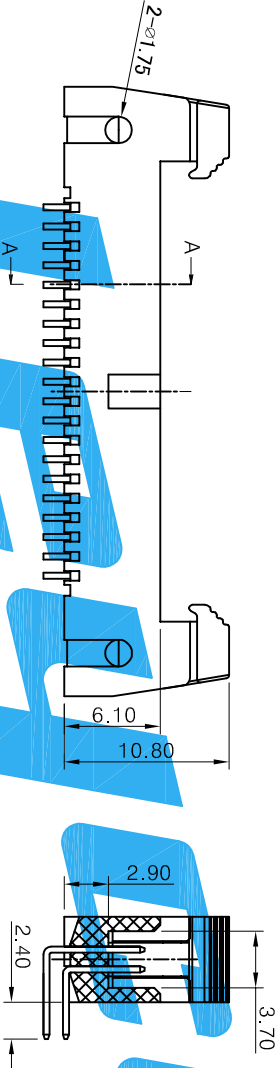

Part Number:

393 NN 0 2 X X X 00

Pitch:(Unit:mm) 3-1.27x1.27
Number of Contact: 10 ~ 64 PIN
Type of terminations: 2 - Right Angle Type
Insulator Color: 1-Black
Insulator Material: 2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated: 0-Tin 1-Gold Flash 3-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"

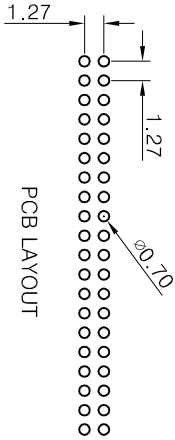

PCB LAYOUT

E

D

C

B

A

E		Units	mm	Scale	2:1	Drawing By	Date	leyconn LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522	
D		Tolerance Unless		Otherwise Specified		Lin-Wu	2019/04/19		
C						Reviewed By	Date	Sheet	1 of 1
B						YP-Liang	2019/04/19	Title	
A						Approval By	Date	Ejector Header Connector	
REV						Kirby-Xiao	2019/04/19	Pitch:1.27mm RA Type	
						Third Angle Projection		Part No.	393NN02XXX00
								REV	A

E

D

C

B

A