

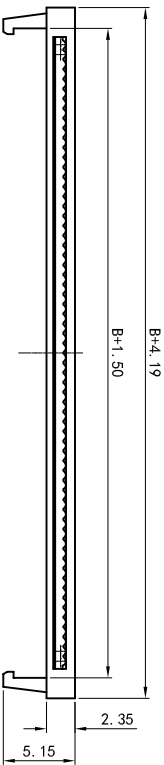

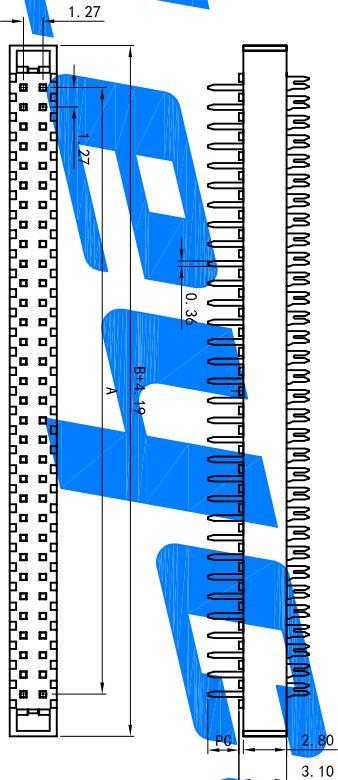


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

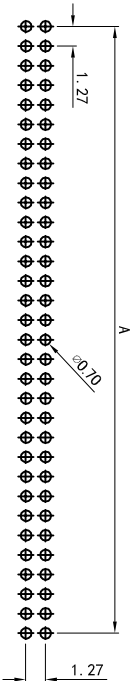

PCB LAYOUT

ISSUED

LEYCONN
CONFIDENTIAL
2019-04-03

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp:180℃ for30-60 seconds
(200℃ for 10 seconds)

Part Number:

203 NN 0 6 X X X X 0

Pitch:(Unit:mm) 3-1.27X1.27

Number of Contact: 06 ~ 80 PIN

Type of terminations: 6 - FD

Contact Plated: 0-Tin 2-Gold 3u" 6-Gold 10u" 8-Gold 30u"

1-Gold Flash 5-Gold 5u" 7-Gold 15u"

Solder Length: 0-3.00mm 1-2.00mm 2-2.30mm

Insulator Color: 1-Black

Insulator Material: 1-PBT 4-PA6 5-PA6T 9-PA9T

LEYCONN
Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Title 1.27mm FD DIP Type
Part No. 203NN06XXXXX0
REV A

Units	mm	Scale	3:1
Tolerance Unless			
Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	Date
Hui-Men	2019/04/03
Reviewed By	Date
Loek-Wu	2019/04/03
Approval By	Date
Ki rby-Xi ao	2019/04/03

Part No.	REV
203NN06XXXXX0	A

Contacts	DIM A	DIM B
6	2.54	3.81
8	3.81	5.08
10	5.08	6.35
12	6.35	7.62
14	7.62	8.89
16	8.89	10.16
18	10.16	11.43
20	11.43	12.70
24	13.97	15.24
26	15.24	16.51
30	17.78	19.05
34	20.32	21.59
40	24.13	25.40
44	26.67	27.94
50	30.48	31.75
60	36.83	38.10
64	39.37	40.64
80	49.53	50.80

DESCRIPTION.	Date
RELEASED	03/04/19

REV	DESCRIPTION.
1	2