
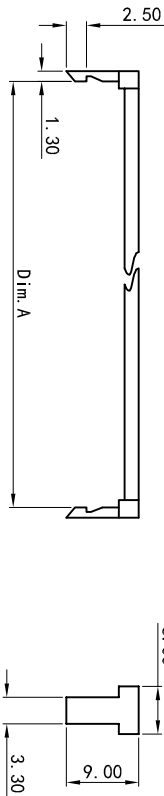
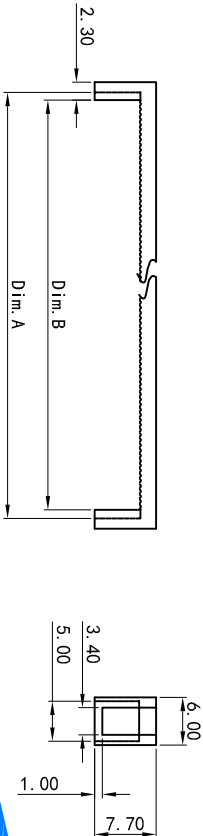
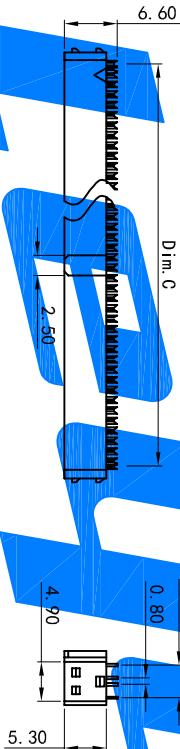


MATERIAL :
INSULATOR : PBT+30% GLASS FIBER (UL94V-0)
CONTACT : PHOSPHOR BRONZE
CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :
CURRENT RATING : 1AMP.
WITHSTANDING VOLTAGE : AC 500V R.M.S
INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM
AT DC 500V.
CONTACT RESISTANCE : 15 MILLIOHMS MAXIMUM.
OPERATING TEMPERATURE : -40C~+105C.

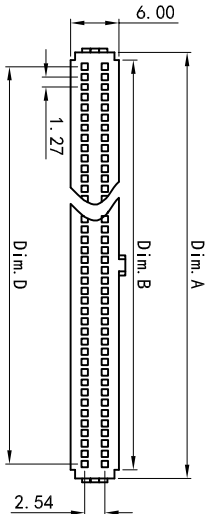

NO.OF.PINS	A	B	C	D
6	6.01	4.11	3.18	2.54
8	7.26	5.38	4.45	3.81
10	8.55	6.65	5.72	5.08
16	12.36	10.46	9.53	8.89
20	14.90	13.00	12.07	11.43
26	18.71	16.81	15.88	15.24
30	21.25	19.35	18.42	17.78
40	27.60	25.70	24.77	24.13
50	33.95	32.05	31.12	30.48
60	40.30	38.40	37.47	36.83
68	45.38	43.48	42.55	41.91
80	53.00	51.10	50.17	49.53
100	65.7	63.8	62.87	62.23

Part Number:


204 NN 0 5 X X X 0 0

Pitch:(Unit:mm) 3-1.27X2.54
Insulator Color: 1-Black

Number of Contact: 06 ~ 100 PIN (A0=100P)
Type of terminations: 1-PBT
Contact Plated: 0-Tin 1-Gold Flash 2-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"

5 - Flat Cable-IDC Type / IDC

Insulator Material: 1-PBT
Contact Plated: 0-Tin 1-Gold Flash 2-Gold 3u" 5-Gold 5u" 6-Gold 10u" 7-Gold 15u" 8-Gold 30u"



leyconn

Http://www.leyconn.com

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

E	Units	mm	Scale	1:1	Drawing By	Date	2019/04/03	Sheet	1 of 1	Title	I.D.C Connector Pitch:1.27*2.54mm
D	Tolerance Unless	Otherwise Specified			Reviewed By	Date	2019/04/03				
C					Loek-Wu	2019/04/03					
B											
A	RELEASED	03/04/19			Approval By	Date	2019/04/03				
REV	DESCRIPTION.	Date	Angle	~ ± 3°	Kirby-Xiao	2019/04/03					

1	2	3	4	5	6	7	8
1	2	3	4	5	6	7	8