
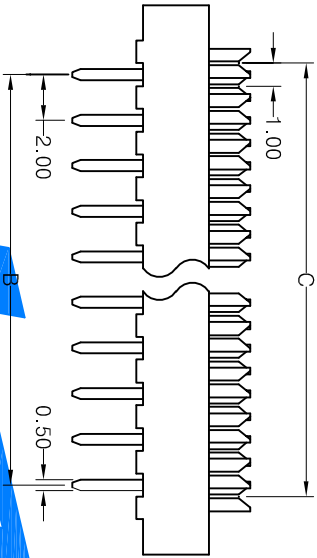


Pos	Dim.A	Dim.B	Dim.C
6	10.10	4.00	5.00
8	12.10	6.00	7.00
10	14.10	8.00	9.00
12	16.10	10.00	11.00
14	18.10	12.00	13.00
16	20.10	14.00	15.00
18	22.10	16.00	17.00
20	24.10	18.00	19.00
22	26.10	20.00	21.00
24	28.10	22.00	23.00
26	30.10	24.00	25.00
28	32.10	26.00	27.00
30	34.10	28.00	29.00
32	36.10	30.00	31.00

Pos	Dim.A	Dim.B	Dim.C
34	38.10	32.00	33.00
36	40.10	34.00	35.00
38	42.10	36.00	37.00
40	44.10	38.00	39.00
42	46.10	40.00	41.00
44	48.10	42.00	43.00
46	50.10	44.00	45.00
48	52.10	46.00	47.00
50	54.10	48.00	49.00
52	56.10	50.00	51.00
54	58.10	52.00	53.00
56	60.10	54.00	55.00
58	62.10	56.00	57.00
60	64.10	58.00	59.00



MATERIAL&FINISH
Insulator: PBT Glass Fiber(UL94V-0)

Contact : Brass

Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating :1A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range:-40°C To+105°C

Contact Resistance:20mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:500V AC/Min

Part Number:

202 NN 0 6 X 1 X 00

Pitch:(Unit:mm)┐

2-2.00x2.00,

Number of Contact:┐

06 ~ 80 PIN

Type of terminations:┐

6 - FD

Contact Plated:┐

0-Tin 1-Gold Flash 2-Gold 3u"

5-Gold 5u" 6-Gold 10u" 7-Gold 15u"

8-Gold 30u"



Insulator Material:┐

1-PBT

Insulator Color:┐

1-Black 2-Grey 3-White

4-Blue 5-Red 6-Yellow

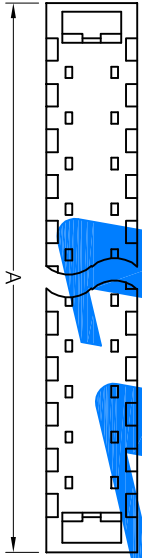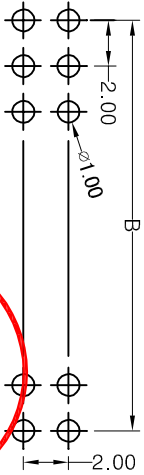

Recommend p.c/Bobbin

ISSUED
2019-04-03

E		Units	mm	Scale	3:1	Drawing By	Date		
D				Tolerance Unless		Hui-Wen	2019/04/03		
C				Otherwise Specified		Reviewed By	Date		
B				.XX ~ ±0.30		Loek-Wu	2019/04/03		
A				.XXX ~ ±0.25		Approval By	Date		
REV		DESCRIPTION.		Angle ~ ± 3°		Kirby-Xiao	2019/04/03	Third Angle Projection	Part No.
1	2	3	4	5	6	7	8		

LEYCONN

LEYCONN ELECTRONICS CO.,LTD.

深圳市联益康电子有限公司

TEL: +86(755)26078616 FAX: 26070522

2.0mm FD Connector DIP Type

202NN06XXX00