
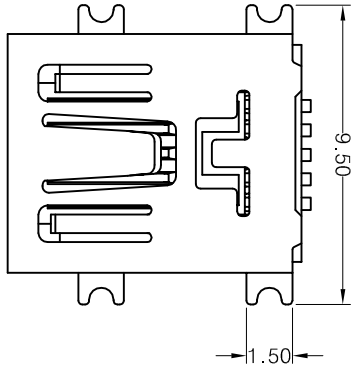
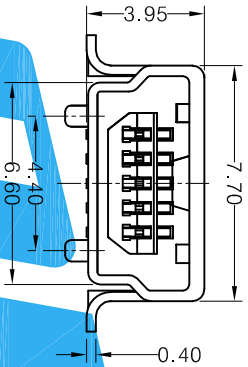
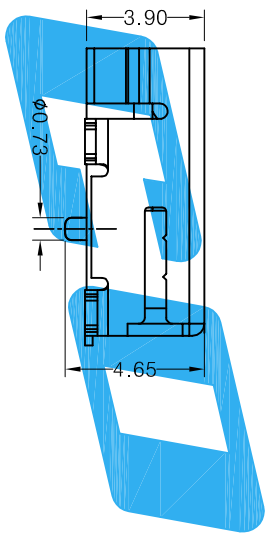
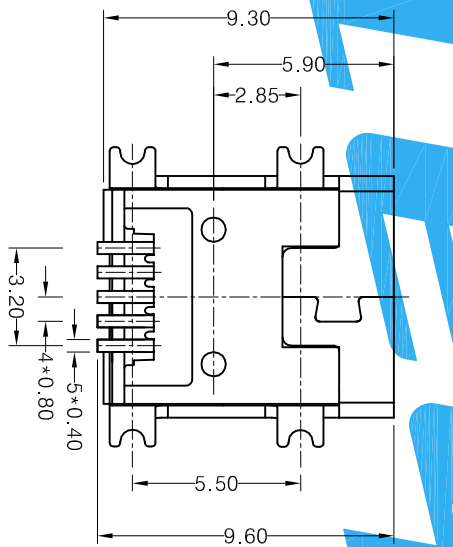


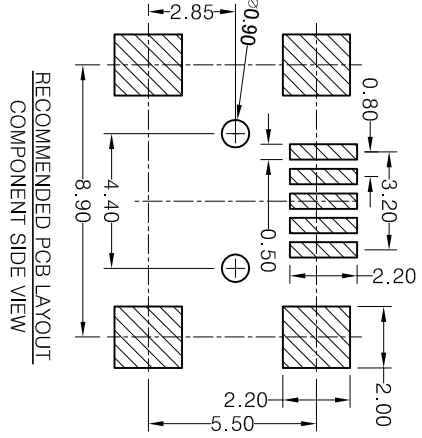

- NOTES:
1. Material Specification:
 - 1) Insulator Material : High temperature plastic (See Part Number)
 - 2) Insulator Flammability : UL 94V-0
 - 3) Shell : Brass/SPCC
 - 4) Plating: Ni
 - 5) Terminal : Copper Alloy
 - 6) Plating : Gold/Tin Plated
 - 7) Electrical Characteristic:
 - 1) Insulation Resistance : 1000M Ω Min.
 - 2) Contact Resistance : 30m Ω MAX.
 - 3) Withstanding Voltage: 500V AC /minute
 - 4) Current Rating: 1.0 AMP
 - 5) Operating Temperature: -40°C ~ +105°C
 - 8) Mechanical Characteristic:
 - 1) Insertion Force : 4.5Kgf Max.
 - 2) Extraction Force : (1.0~4.0)Kgf

Part Number:

434 2 5 4 X X X X 0 X

- Series No.: _____
- 4-MINI USB
- Connector Type: _____
- 2- Female
- Number of Contact: _____
- 5-5 PIN
- Mounting options:
- 4-Surface mount
- Plating Code : _____
- 1-Selective gold flash over nickel
- 3-Selective 0.075um gold over nickel
- 5-Selective 0.125um gold over nickel
- 6-Selective 0.25um gold over nickel
- 7-Selective 0.375um gold over nickel
- 8-Selective 0.75um gold over nickel
- Packaging options:
- 1-Tube packaging PVC
- 2-Tape & Reel packaging
- 3-Pallet packaging
- Insulator Color:
- 0-White 1-Black
- Material (Insulator + shell) :
- 1-PBT + Brass 2-LCP + Brass
- 4-PA46 + Brass A-PBT + SPCC
- B-LCP + SPCC D-PA46 + SPCC

E		Units	mm	Scale	3:1	Drawing By	Date	<div></div> <div>LEYCONN ELECTRONICS CO.,LTD.</div> <div>深圳市联益康电子有限公司</div> <div>TEL: +86(755)26078616 FAX: 26070522</div>	
D		Tolerance Unless		Otherwise Specified		Reviewed By	Date		
C		.X ~ $\pm$ 0.30				Loek-Wu	2019/04/08	Sheet 1 of 1	
B		.XX ~ $\pm$ 0.25				Approval By	Date		
A		.XXX ~ $\pm$ 0.20				Kirby-Xiao	2019/04/08	Third Angle Projection	
REV		Angle ~ $\pm$ 3°							
DESCRIPTION.								Part No.	434254XXXXXX
								MINI 5PIN USB SMT Type	
								REV	A