


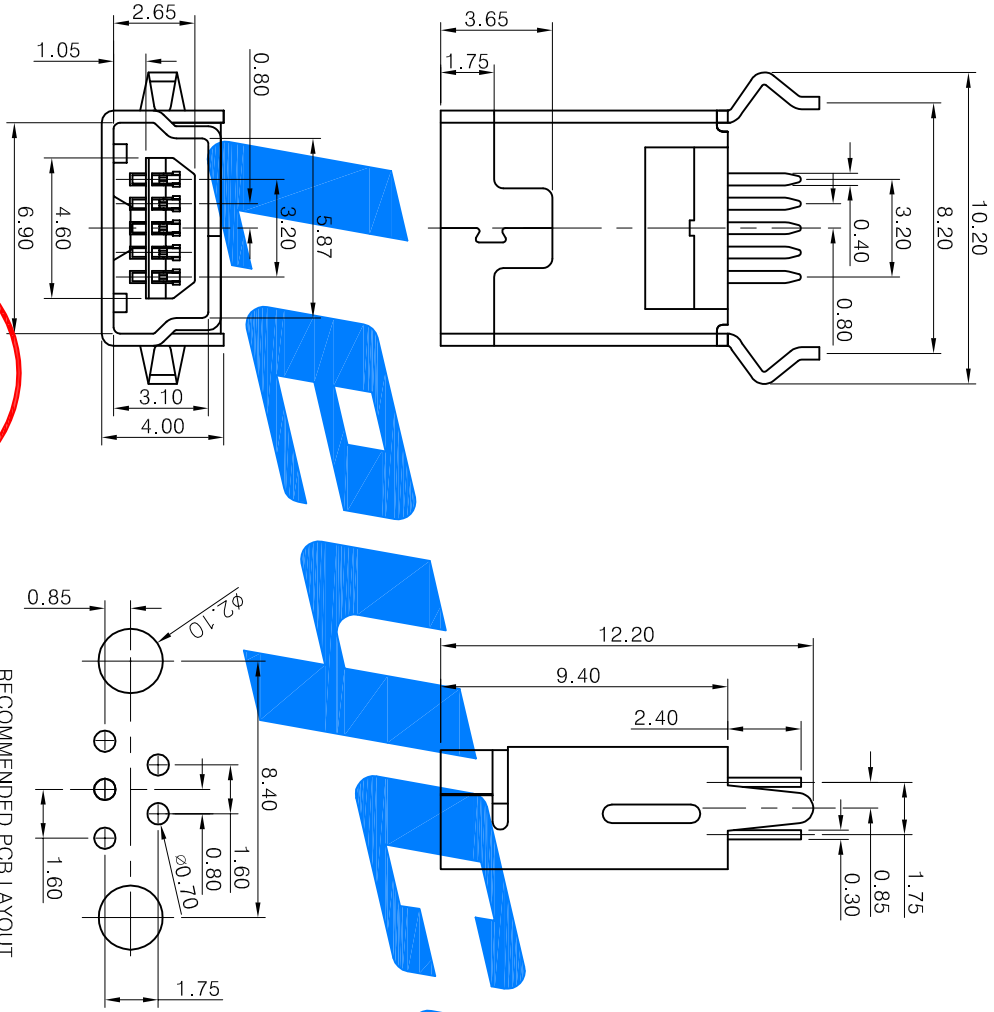

NOTES:
1. Material Specification:
1) Insulator Material : High temperature plastic
(See Part Number)
Insulator Flammability : UL 94V-0
2) Shell : Brass/SPCC
Plating: Ni
3) Terminal : Copper Alloy
Plating : Gold/Tin Plated
2. Electrical Characteristic:
1) Insulation Resistance : 1000MΩ Min.
2) Contact Resistance : 30mΩ MAX.
3) Withstanding Voltage: 500V AC /minute
4) Current Rating: 1.0 AMP
5) Operating Temperature: -40°C ~ +105°C
3. Mechanical Characteristic:
1) Insertion Force : 4.5Kgf Max.
2) Extraction Force : (1.0~4.0)Kgf

Part Number: 434251XXXXWH

Series No.: 434251XXXXWH

4-Mini USB

Connector Type: 2-Female

Number of Contact: 5-5PIN

Tail & Mounting Style: 1-Straight solder

Plating Code : 1-Selective gold flash over nickel
3-Selective 0.075um gold over nickel
5-Selective 0.125um gold over nickel
6-Selective 0.25um gold over nickel
7-Selective 0.375um gold over nickel
8-Selective 0.75um gold over nickel

Insulator material: 1-PBT(Cu shell) 2-LCP(Cu shell)
4-PA46(Cu shell) A-PBT(Fe shell)
B-LCP(Fe shell) D-PA46(Fe shell)

Insulator Color: 0-White 1-Black

Packaging options: 1-Tube packaging PVC
3-pallet packaging

ISSUED
leyconn
CONFIDENTIAL
2019-04-08

E		Units	mm	Scale	3:1	Drawing By	Date
D		Tolerance Unless		Otherwise Specified		Nick-Yin	2019/04/08
C		.X ~ ±0.30		Reviewed By		Hui-Men	2019/04/08
B		.XX ~ ±0.25		Approval By		Kirby-Xiao	2019/04/08
A		.XXX ~ ±0.20		Date			
REV		DESCRIPTION.		Angle ~ ± 3°			
1		2		3		4	
5		6		7		8	

LEYCONN ELECTRONICS CO.,LTD.	
深圳市联益康电子有限公司	
Http://www.leyconn.com	
TEL: +86(755)26078616 FAX: 26070522	
Sheet 1 of 1	
Title Mini USB-5P B型 DIP 弯脚	
Third Angle Projection	
Part No. 434251XXXXWH	
REV A	