



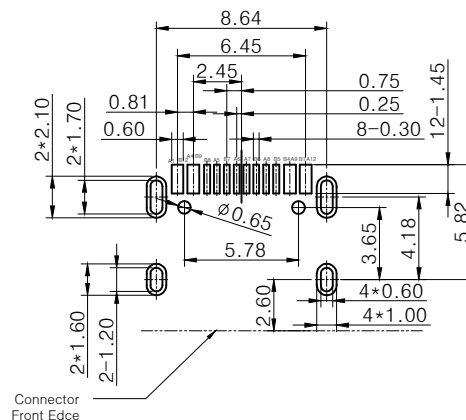
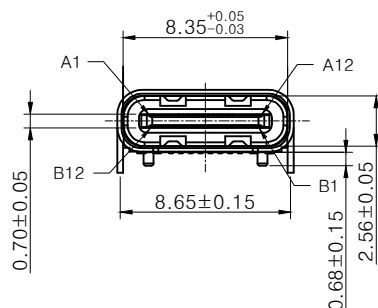


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

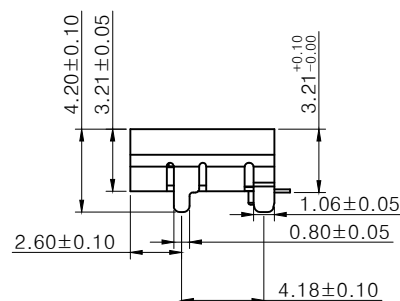

P.C.B. Layout
Tolerance Unspecified±0.05mm

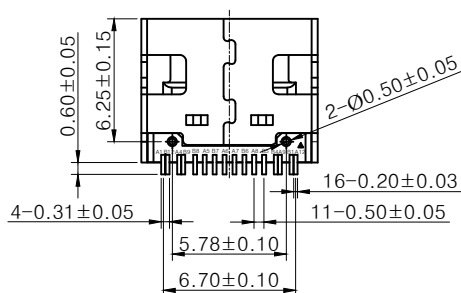

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

备注:

电气特性:

- 额定电流: 3A Min for vbus
0.25A min for other
- 接触阻抗: 40 milliohms MAX
- 绝缘阻抗: 100Mega ohms Min
- 耐压测试: 250V AC
- 插拔力: Mate force: 2.0kgf(Max)
0.8kgf(Min)
- 使用寿命: 10000次 Unmate force:
- 工作温度: -55°C~85°C

材料:

- 塑胶: LCP+30%G.F UL94V-0
- 端子: Copper Alloy C5191
- 外壳: 不锈钢 T=0.30mm

Part Number:

43A2A412120 J

E			Units	mm	Scale	3:1	Drawing By	Date	<div><div><div>Leyconn</div><div>LEYCONN ELECTRONICS CO.,LTD.</div><div>深圳市联益康电子有限公司</div><div>Http://www.leyconn.com</div><div>TEL: +86(755)26078616</div><div>FAX: 26070522</div></div></div>							
D			Tolerance Unless				Lin-Wu	2018/11/16								
C			Otherwise Specified				Reviwed By	Date								
B			.X ~ ±0.30				Hui-Wen	2018/11/16	Sheet	1 of 1	Title		USB C TYPE 母座 LCP 黑胶 铜壳 单排			
A	RELEASED	16/11/18	.XX ~ ±0.25				Approval By	Date	Third Angle Projection				Au1u SMT 四脚插板有柱 J			
REV	DESCRIPTION.	Date	.XXX ~ ±0.20				Kirby-Xiao	2018/11/16			Part No.	43A2A412120J			REV	A
			Angle ~ ± 3°													