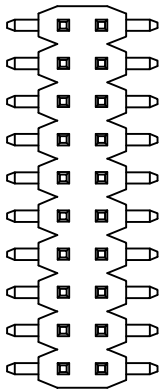
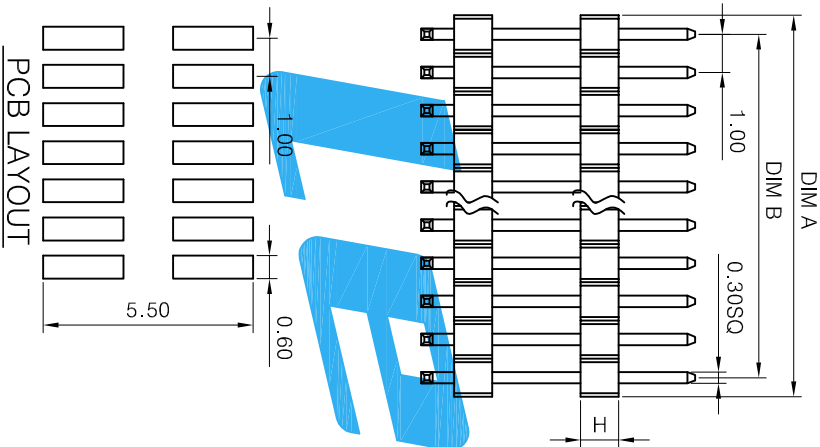


PCB LAYOUT

SPECIFICATIONS

Current Rating: 1A
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min
Withstand Voltage:200V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

N=No. of contacts / per row		
P/位	(1~49)	50
Dim A	1.00*N-0.20	50.0
Dim B	1.00*(N-1)	

Part Number:

35 2 NN X X 3 XXX X

Pitch(Unit:mm):
5-1.00
Number of Row:
2-Double Row
Pin number of each row:
01 ~ 50 PIN
Insulator Material:
2-LCP 4-PA46 5-P-PA6T 9-P-PA9T
Contact Plated:
0-Tin over nickel ,1-Gold flash over nickel
2-0.05um gold over nickel 3-0.075um gold over nickel,
5-0.125um gold over nickel 6-0.25um gold over nickel,
7-0.375um gold over nickel 8-0.75um gold over nickel,
A-0.02um gold over nickel B-0.01um gold over nickel

Serial number:
Determined by the LEYCONN
Pin Length:
XXX-A+B+D+(W-1)/2 (Double row)
Tail & Mounting Style:
3-SMT Type

LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet 1 of 1
Title 1.00mm PIN Header, Dual Row, S.M.T
Part No. 352NNXX3XXXX

E		Units	mm	Scale	5:1	Drawing By	Date
D		Tolerance Unless		Otherwise Specified		Hui-Wen	2019/03/18
C		.X ~ ±0.30		.XX ~ ±0.25		Revised By	Date
B		.XXX ~ ±0.20		Angle ~ ± 3°		Nick-Yin	2019/03/18
A		RELEASED		18/03/19		Approval By	Date
REV		DESCRIPTION.		Date		Kirby-Xiao	2019/03/18
1		2		3		4	5
6		7		8			