
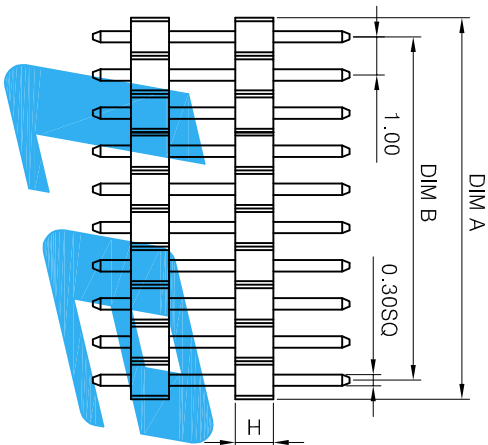
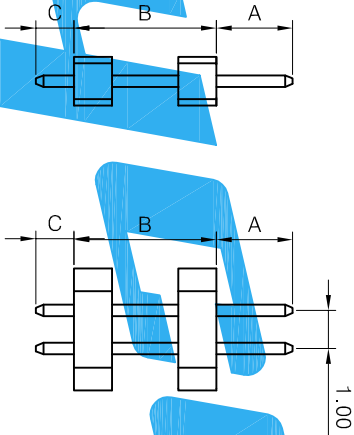
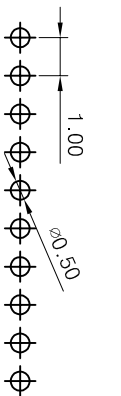


N=No. of contacts / per row

Dim	P位	(1-49)	50
Dim A		1.00*N-0.20	50.0
Dim B		1.00*(N-1)	

SPECIFICATIONS
Current Rating: 1A
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min
Withstand Voltage:200V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn over 50μ"Ni
Insulator Material: Polyester(UL94V-0)

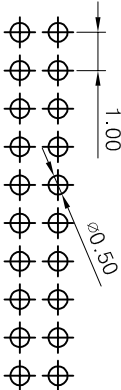

Part Number:

35 X NN X X 1 XXX X

Pitch(Unit:mm):
5-1.00
Number of Row:
1-Single Row 2-Double Row
Pin number of each row:
01 ~ 50 PIN
Insulator Material:
2-LCP 4-PA46 5-PA6T 9-PA9T
Contact Plated:
0-Tin over nickel 1-Gold flash over nickel
2-0.05um gold over nickel 3-0.075um gold over nickel,
5-0.125um gold over nickel 6-0.25um gold over nickel,
7-0.375um gold over nickel 8-0.75um gold over nickel,
A-0.02um gold over nickel B-0.01um gold over nickel
Serial number:
Determined by the LEYCONN
Pin Length:
XXX-A+B+C
Tail & Mounting Style:
1-Straight solder

PCB LAYOUT

PCB LAYOUT

E			Units	mm	Scale	5:1	Drawing By	Date	<div>LEYCONN ELECTRONICS CO.,LTD.</div> <div>深圳市联益康电子有限公司</div> <div>TEL: +86(755)26078616 FAX: 26070522</div>					
D			Tolerance Unless		Hui-Wen		2019/03/18	<div>Http://www.leyconn.com</div>						
C			Otherwise Specified		Reviewed By		Date	Sheet		1 of 1	Title	1.00mm PIN Header, Single/Dual Row, Board Spacer, Straight	REV	A
B			.X ~ ±0.30		Nick-Yin		2019/03/18	Third Angle Projection		Part No.		35XNNXX1XXXX		
A			.XX ~ ±0.25		Approval By		Date							
REV			.XXX ~ ±0.20		Kirby-Xiao		2019/03/18							
			Angle ~ ± 3°											