

This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.


RoHS

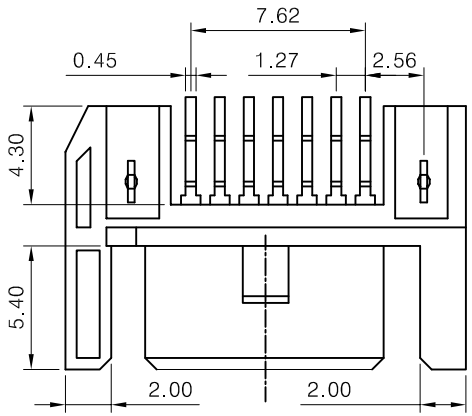


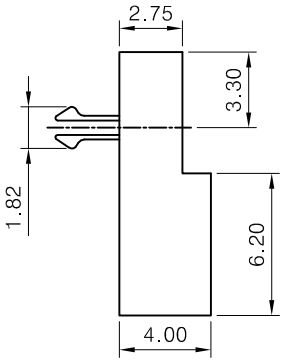


Specifications:

1.Material:
Insulator : LCP (black) UL94V-0
Terminal : Phosphor bronze or brass.
Peg : brass
2.Operating temperature :-55°C ~ +125°C
3.Rating current : 1.0A AC/DC
4.Contact resistance : < 20mΩ
5.Withstand voltage : 500V AC for one minute
6.Insulation resistance : > 100MΩ
7.Finish:
Terminal :Gold/Tin plating on contact area
100u"min.Tin-Lead Plating on solder tails
50u"min.Nickel under plating over all
Peg : 100u"min.Tin-Lead Plating on solder tails
50u"min.Nickel under plating over all

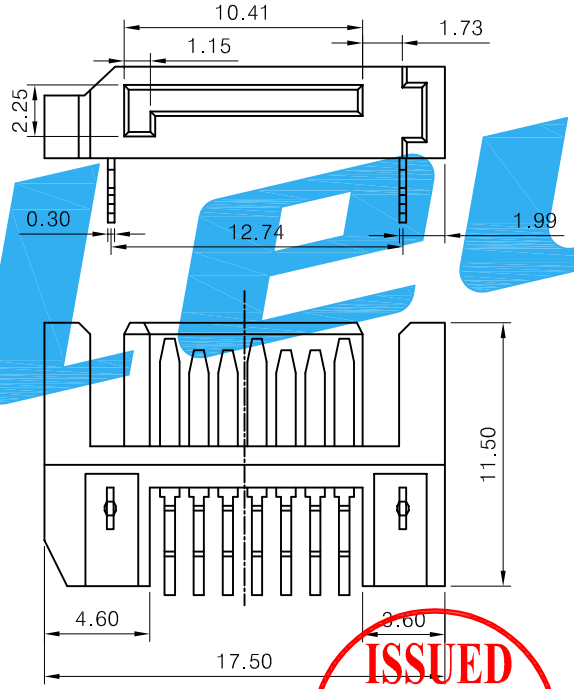

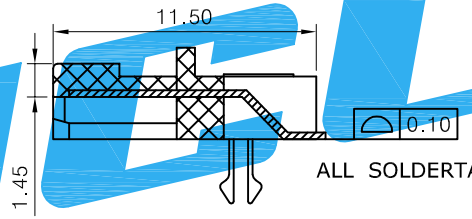

ALL SOLDERTAILS

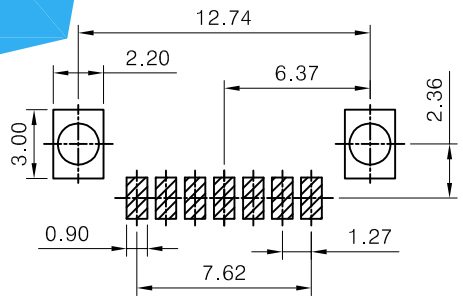

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW

Part Number:

472 07 4 1 3 X 1 0 X

Product Series
472
Number of Contacts:
07 -07PIN
Tail Style:
4-Surface mount-paralle
Locating peg option:
1-with locating peg
Type of terminations:
3 - Frontal

Insulator Code:
1-Black
Plating Code :
1-Selective gold flash over nickel
3-Selective 0.075um gold over nicke
5-Selective 0.125um gold over nickel
6-Selective 0.25um gold over nickel
7-Selective 0.375um gold over nickel
8-Selective 0.75um gold over nickel

ISSUED
Leyconn
CONFIDENTIAL
2019-04-29

REV	DESCRIPTION.	Date
E		
D		
C		
B		
A	RELEASED	29/04/19

Units	mm	Scale	2:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ± 3°			

Drawing By	Lin-Wu	Date 2019/04/29
Reviwed By	YP-Liang	Date 2019/04/29
Approval By	Kirby-Xiao	Date 2019/04/29

Leyconn
Http://www.leyconn.com
LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

Sheet	1 of 1	Title	SATA Surface mount-parallel,Frontal
Third Angle Projection		Part No.	47207413X10X REV A